
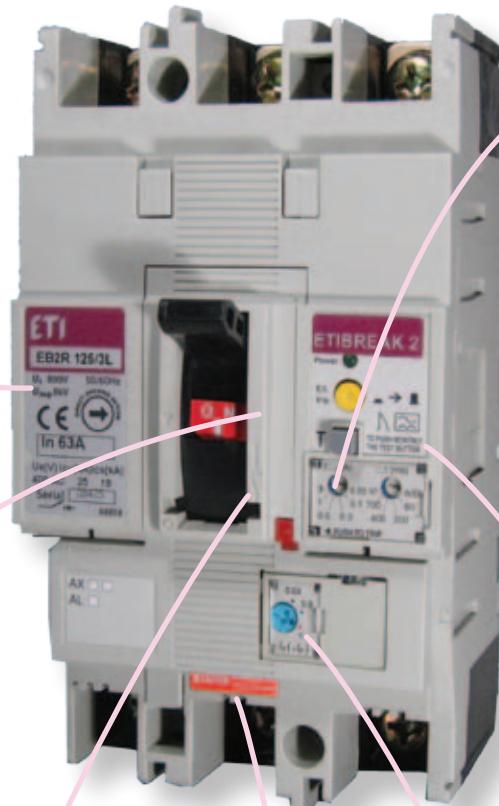


Low voltage moulded case circuit breakers with residual current protection

Main features and advantages

Breaking capacities as on MCCBs



Adjustable residual current tripping thresholds between 30mA and 3A. Adjustable time delay for residual current protection between 60ms and 700ms including INST (instantaneous) and NT (No Trip).



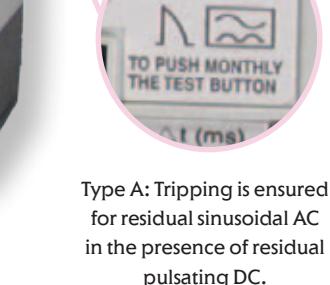
Voltage Presence LED Indicator and Trip Indicator (the yellow button pops up to indicate tripping due to residual current)



Test Button (to test the residual current detection and tripping system)



Dielectric test device plug (to allow dielectric testing with the EB2R closed – ON)



Adjustable overload protection I_R can be set between 63% and 100% of In



Main advantages:





- Combined protection against overloads, short circuits and earth leakage integrated in one device
- The new EB2R save the space
- The EB2R has the same dimensions and fixing as the EB2 MCCBs
- The EB2R eliminates the need for either an external relay with current transformers or add-on block
- Residual current is adjustable
- Earth leakage protection time delay is adjustable
- Wide range of accessories (as MCCB – only shunt/undervoltage trip units can not be fitted to EB2R)

Product series	description	unit	condition	EB2R	EB2R
Model-type				125L	250L
Number of Poles				3, 4	3, 4
Nominal current ratings					
	I_n	(A)	50°C	20, 32, 50	160, 250
				63, 100, 125	
Electrical characteristics					
Rated operational voltage	U_e	(V)	AC 50/60 Hz	525	525
Rated impulse withstand voltage	U_{imp}	(kV)		8	8
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I_{cu}	(kA)	525V AC	8	10
			440V AC	15	15
			400/415V AC	25	25
			220/240V AC	35	35
Service breaking capacity (IEC, JIS, AS/NZS)	I_s	(kA)	525V AC	6	7.5
			440V AC	12	12
			400/415V AC	19	19
			220/240V AC	27	27
Protection					
Adjustable thermal, adjustable magnetic				■	■
Residual current protection, Type A				■	■
Utilization category				A	A
Installation					
Front connection				■	■
Attached flat bar				•	•
Solderless terminal (cable clamp)				•	•
Rear connection				•	•
Plug-in				-	-
DIN rail mounting				•	-
Dimensions	h	(mm)		155	165
	w	(mm)	3 pole	90	105
			4 pole	120	140
	d	(mm)		68	68
Weight	W	(kg)	3 pole	1.1	1.5
			4 pole	1.4	1.9
Operation					
Direct Opening Action				■	■
Toggle operation				■	■
Variable depth / direct mount operating handle				•	•
Mechanical interlocks				-	-
Motor operator				•	•
Endurance	Electrical	cycles	440V AC	30000	30000
	Mechanical	cycles		30000	30000
Standards				IEC 60947-2, EN 60947-2	

■ Standard • Optional - Not Available

EB2R adjustments


Residual current $I_{\Delta n}$ is the adjustable tripping threshold for earth leakage protection. It can be set between 30mA and 3A. Available settings are 30mA, 100mA, 300mA, 500mA, 1000mA and 3000mA. Available settings are shown below	Time delay Δt is introduced to the residual current (earth leakage) protection characteristic. Available settings are; INST, 60ms, 200ms, 400ms, 700ms and NT. INST means EB2R set to time delay 0 (max. actual tripping time is 40ms) NT means No trip (tripping time is 0) The maximum breaking time is shown in brackets. Note that $I_{\Delta n}$ is set at 30mA, Δt defaults 0.	I_n is the adjustable tripping threshold for overload protection. It can be set between 0,63 and 1,0 times $I_{\Delta n}$. Available I_n ratings are shown below	I_s is the tripping threshold for short-circuit protection. It is fixed at the values shown below	
Model	$I_{\Delta n}$	Δt (ms)	I_n (A)	
EB2R 125	0,03, 0,1, 0,3, 0,5, 1, 3	0(40), 60(195), 200(365), 400(620), 700(950), NT (∞)	20, 32, 50, 63, 100	$12 \times I_n$ (+/- 20%)
EB2R 125	0,03, 0,1, 0,3, 0,5, 1, 3	0(40), 60(195), 200(365), 400(620), 700(950), NT (∞)	125	$10 \times I_n$ (+/- 20%)
EB2R 250	0,03, 0,1, 0,3, 0,5, 1, 3	0(40), 60(195), 200(365), 400(620), 700(950), NT (∞)	160	$13 \times I_n$ (+/- 20%)
EB2R 250	0,03, 0,1, 0,3, 0,5, 1, 3	0(40), 60(195), 200(365), 400(620), 700(950), NT (∞)	250	$10 \times I_n$ (+/- 20%)

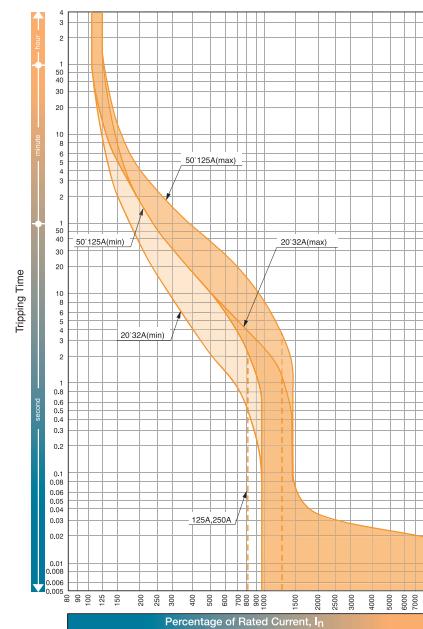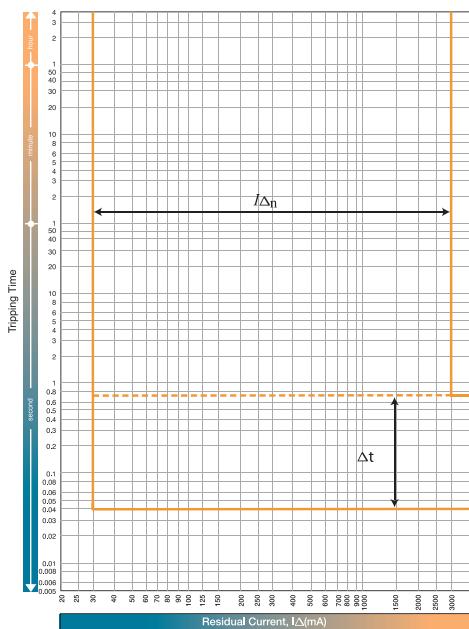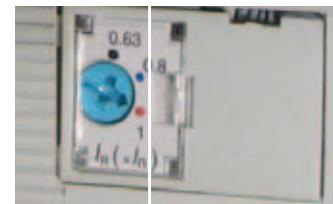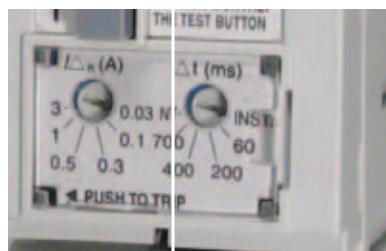


Dimensions

EB2 & EB2R 125

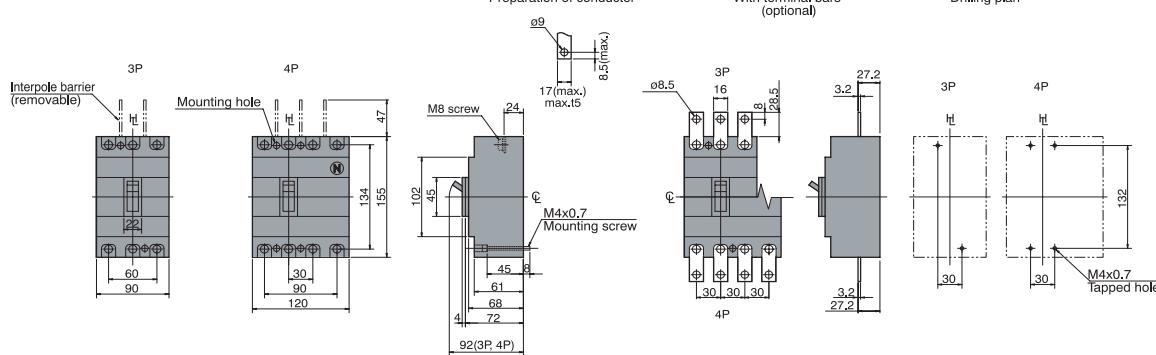
Front connected




Rear connected

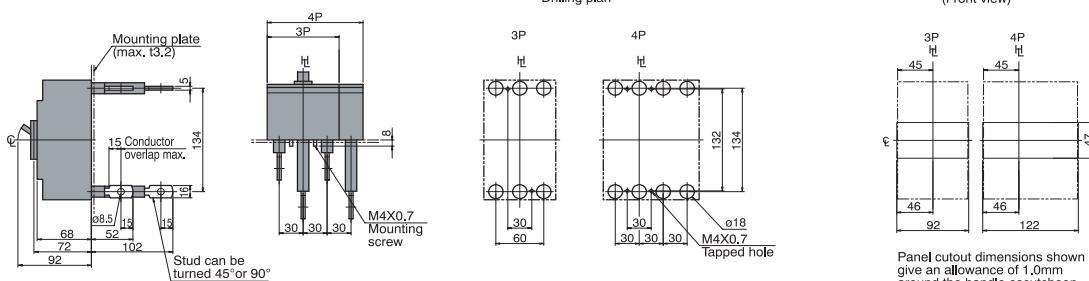

Front connected with Motor Operator







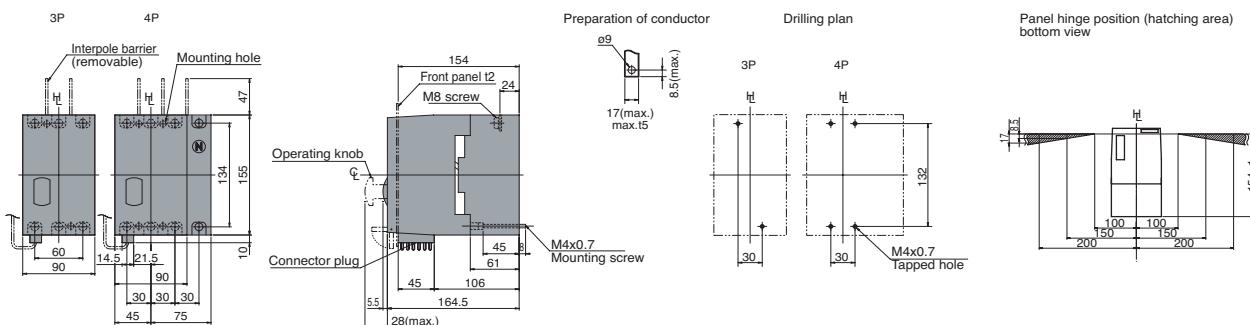


Rear connected with Motor Operator







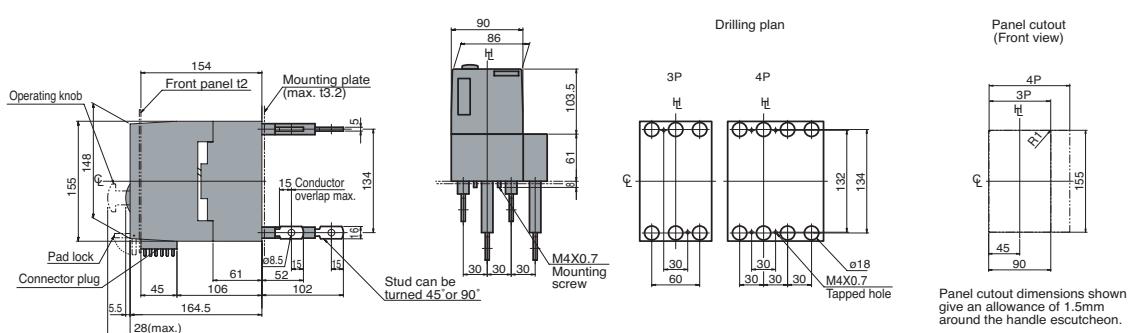


Panel cutout dimensions shown give an allowance of 1.5mm around the handle escutcheon.

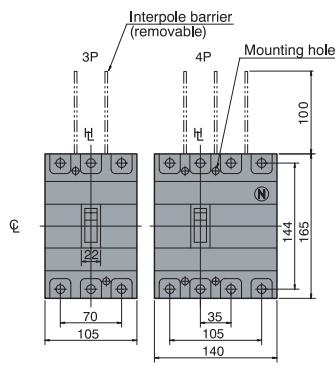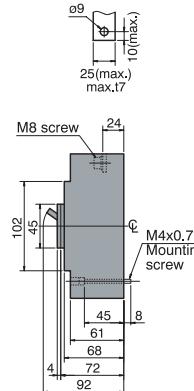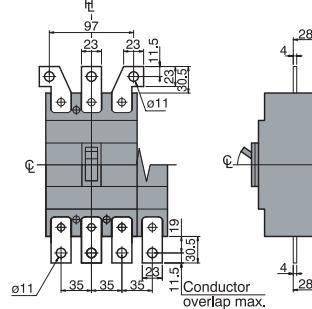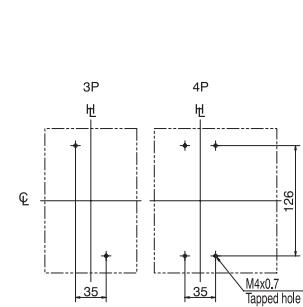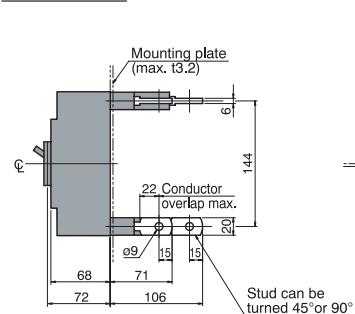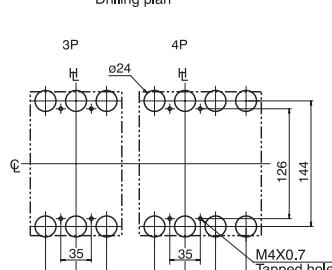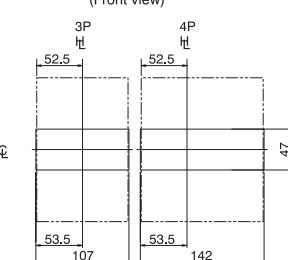EB2 160, EB2 250 & EB2R 250

Front connectedPreparation of conductorWith terminal bars (optional)Drilling planRear connectedDrilling planPanel cutout (Front view)

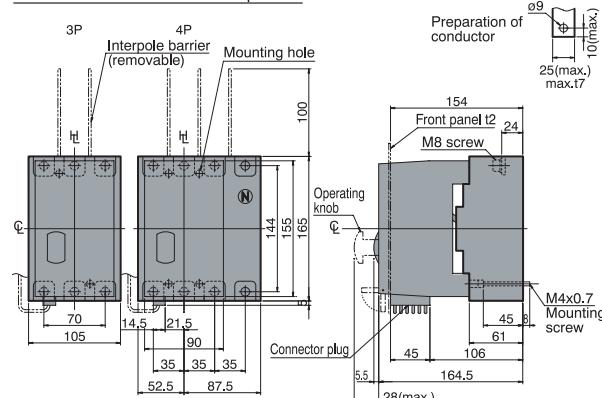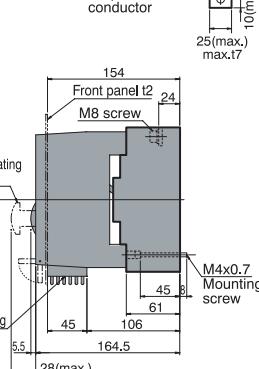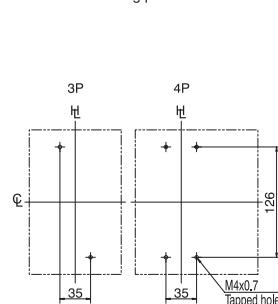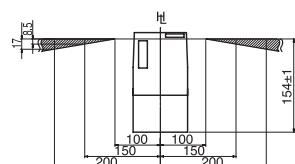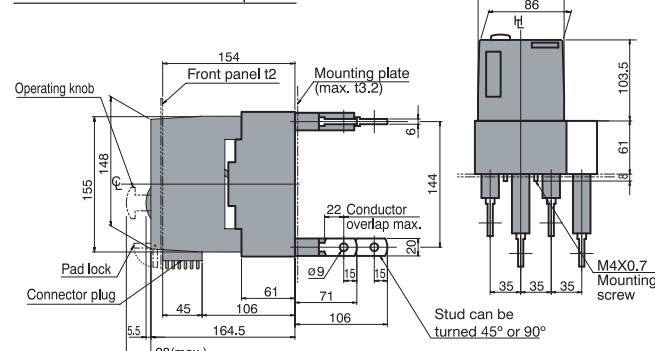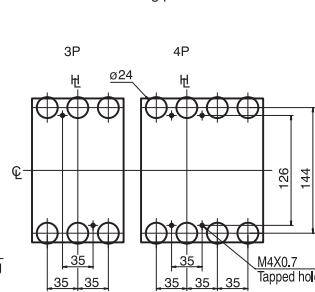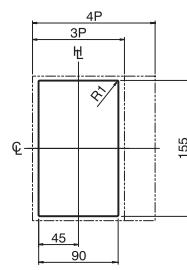Panel cutout dimensions shown give an allowance of 1.0mm around the handle escutcheon.

Front connected with Motor OperatorPreparation of conductorDrilling planPanel hinge position (bottom view)Rear connected with Motor OperatorDrilling planPanel cutout (Front view)

Panel cutout dimensions shown give an allowance of 1.5mm around the handle escutcheon.