

Din rail distribution blocks EDB

Construction

- Brass screw terminal blocks double-deck
- Housing made of self extinguishing material
- Cover and separating made of polycarbonate


Application

Proper and transparent connecting cables in low voltage distribution boards


Advantages

- TH35 din rail mounted or on a flat surface
- Safe and easy installation
- Transparent cover
- 2 or 4 pole model
- Self extinguishing material
- Possibility of connecting wires with ferrules or without

Ordering:

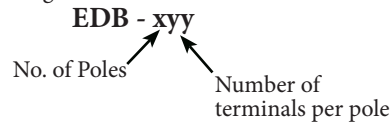

Technical data:	
Degree of protection	IP20 (with closed cover)
Short circuit withstand capability I_{sc}	20kA
Rated current	125A
In accordance with	EN 60947-1, EN 60947-7-1

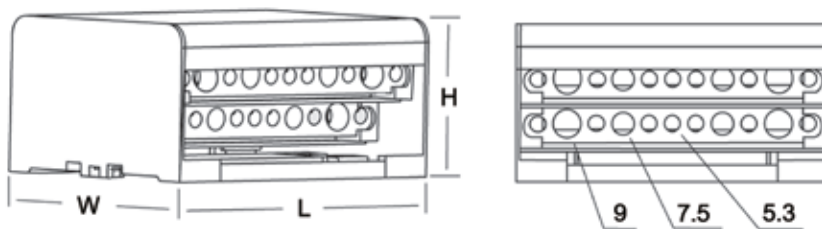

Wire cross section by terminal size		
Wire with ferrule	Wire without ferrule	Terminal size [mm]
1,5 - 6 mm ²	2,5 - 6 mm ²	Ø 5,3
6 - 16 mm ²	10 - 25 mm ²	Ø 7,5
10 - 16 mm ²	10 - 35 mm ²	Ø 9