


## SLD EL LED 3h 32m IR SC/C WM

**Item number** EN10031014  
**GTIN** 4015120031014

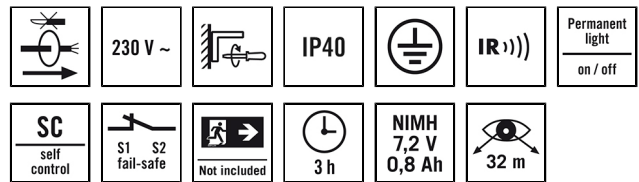

### Product description

- Single battery emergency light with 3 hour emergency light duration and 32 m viewing distance for wall mounting with self-control feature (SC) and fail-safe contact (opens if power fails)
- Additional remote control connection (F+, F-) for disabling emergency lighting when building is not in use
- Function test and self-control feature can be enabled using conventional test key or conveniently using the Mobil-SLi remote control
- The single-battery emergency light includes a continuous and a stand-by mode

### Technical data

#### GENERAL

Device category	Escape sign light
User interface	IR remote control
Remote controllable	✓
Conformity	CE, RoHS, WEEE
Warranty	5 years

#### ATTACHMENT

Installation type	Wall mounting
Installation position	Wall

#### HOUSING

Dimensions	Length 360 mm x Width 70 mm x Height/ Depth 235 mm
Weight	951 g
Material	Aluminium
Protection type	IP40
Permissible ambient temperature	5 °C...+35 °C
Colour	aluminium appearance

#### ELECTRICAL VERSION

Protection class	I
Nominal voltage	230 V / 50 Hz
In-rush current	5,5 A / 350 µs
Leakage current	0,02 mA

#### LIGHT

Light emission	direct
Rated output	3 W
Energy efficiency class	A++ to A

#### EMERGENCY LIGHTING

Viewing distance (DIN EN)	32 m
Symbol height	160 mm
Light duration	3 h
Power supply system	Decentralised (single-battery)
Battery status indicator	by LED
Automatic testing	✓


## SLD EL LED 3h 32m IR SC/C WM

Item number	GTIN
EN10031014	4015120031014


### Accessories

Product designation	Item number	GTIN
SL REMOTE CONTROL	EN10017704	4015120017704
SLD SYMBOL 1-SIDE RIGHT	EN10031106	4015120031106
SLD SYMBOL 1-SIDE LEFT	EN10031113	4015120031113
SLD SYMBOL 1-SIDE DOWN	EN10031120	4015120031120
SLD SYMBOL 1-SIDE TOP	EN10033230	4015120033230
ESY-Pen	EP10425356	4015120425356
SLC/SLD BATTERY NiMH 800mAh	EN10030956	4015120030956

### Scale drawing



### Circuit diagram

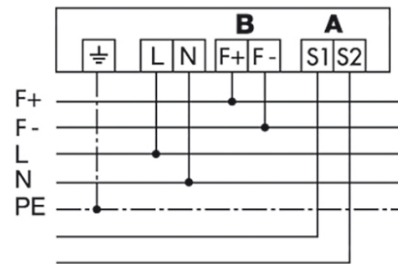

(A) Fail-safe contact.  
Series connection with other emergency lights.  
(B) Remote shutdown.