


### 1. USE

Cable for high-speed VDI transmission networks

PoE and PoE+ applications compatible

### 2. DESCRIPTION

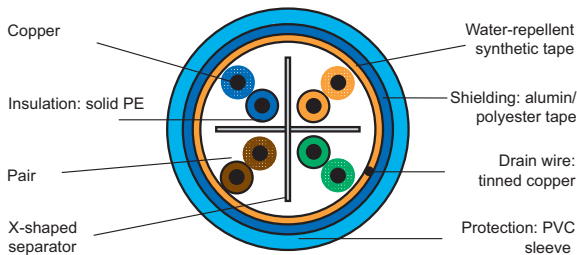

Note : The conductive part of the shielding is located on the wire side

### 3. MARKING AND PACKAGING

Marking of Legrand cables

- LEGRAND
- Catalogue number
- Number of pairs
- Gauge
- Type
- Impedance
- Type of sleeve
- Category
- Conformity to standards
- Batch number
- Measurement (remaining length in metres).
- EUROCLASS Eca
- Velocity of propagation

### 4. PERFORMANCE AT 250 MHZ (STAND. ANSI/TIA 568-C.2)

Reference	0 327 58 - 0 328 57
Maximum attenuation (dB/100 m)	32,8
Minimum NEXT (dB)	38,3
PS NEXT (dB)	36,3
ACRF (dB / 100 m)	19,8
PS ACRF (dB / 100 m)	16,8
Return Loss (dB)	17,3

### 5. TECHNICAL AND MECHANICAL FEATURES

Catalogue number	0327 56 - 0 328 56
Type	F/UTP
Type of sleeve	PVC
Number of pairs	4
Assembly	Pairs
Diameter over insulation (mm)	1,16 ± 0,05
Cable diameter (mm)	7,1 ± 0,5
Weight of cable (kg/km)	40 to 53
Min. bending radius when laying (mm)	60
AWG gauge*	23

\* According to UL 444 ed.3 table 4

**6. ELECTRICAL FEATURES AT 20°C**

Catalogue number	0 327 58 - 0 328 57
Type	F/UTP
Maximum linear resistance (ohm/km)	95 *
DC dielectric strength	1 KV / 1 min *
Minimum insulation resistance (Mohm.km)	5000
Minimum propagation speed	>65 %
Characteristic impedance at 100 MHz	100 ±5Ω

\* According to standard IEC 61156-5

**7. ORDERING INFORMATION**

Catalogue number	0 327 58	0328 57
Type	F/UTP	
Colour	Blue RAL 5015	
Pack (m)	500	305
Packaging	Reel	Box

**8. ENVIRONMENTAL FEATURES**

Transport temperature: 0 at + 50 °C

Storage temperature before use: 10°C during 24h (if stock ≤ 5°C )

Usage temperature: – 20 to + 60 °C

Fire rating :  
IEC 60332-3-24

EUROCLASS EN 13501-6 = Class Eca

**9. STANDARDS AND APPROVALS**

Cat 6, 250 MHz

ANSI/TIA 568-C.2

EN 50173-1

EN 50288-5-1

ISO/IEC 11801 (ed. 2.2)

IEC 61156-5

IEEE 802.3at : PoE+