


### 1. USE

Cable for high-speed VDI transmission networks

### 2. DESCRIPTION

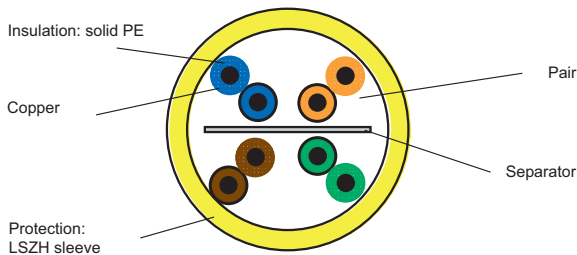

### 3. MARKING AND PACKAGING

Marking of Legrand cables

- LEGRAND
- Catalogue number
- Number of pairs
- Gauge
- Type
- Impedance
- Type of sleeve
- Category
- Conformity to standards
- EUROCLASS
- Velocity of propagation
- Traceability
- Measurement (remaining length in metres).

Complementary marking (on label)

- Designation
- Made in....

### 4. PERFORMANCE AT 500 MHZ (STAND. ANSI/TIA 568.2-D)

Reference	0 327 87
Maximum attenuation (dB/100 m)	45,3
Minimum NEXT (dB)	33,8
PS NEXT (dB)	31,8
ACRF (dB / 100 m)	13,8
PS ACRF (dB / 100 m)	24,2
Return Loss (dB)	15,2

### 5. TECHNICAL AND MECHANICAL FEATURES

Catalogue number	0 327 87
Type	U/UTP
Type of sleeve	LSZH
Number of pairs	4
Assembly	Pairs
Diameter over insulation (mm)	1,08±0,1
Average nominal diameter of the cable (mm)	8,3±0,5
Weight of cable (kg/km)	64
Min. bending radius when laying (mm)	70
AWG gauge*	23

\* According to UL 444 ed.3 table 4

**6. ELECTRICAL FEATURES AT 20°C**

Catalogue number	0 327 87
Type	U/UTP
Maximum linear resistance (ohm/km)	93,8*
DC dielectric strength	1 KV / 1 min *
Minimum insulation resistance (Mohm.km)	5000
Minimum propagation speed	64 %
Characteristic impedance at 100 MHz	100 ±5Ω

\* According to standard IEC 61156-5

**7. ORDERING INFORMATION**

Catalogue number	0 327 87
Type	U/UTP
Colour	Yellow RAL 1018
Pack (m)	500
Packaging	Reel

**8. ENVIRONMENTAL FEATURES**

Transport and storage temperature: 0 at + 50 °C  
 Storage temperature before use: 10°C during 24h (if stock ≤ 5°C )  
 Usage temperature: - 20 to + 60 °C

Fire rating:EN 50399, IEC 60332-1-2, EN 60332-1-2  
 Smoke density : IEC 61034-2, EN 61034-2  
 Toxicity of fire effluent : IEC 60754-2, EN 60754-2

EUROCLASS EN 13501-6 = Class Dca s2d2a1  
 Also compliant with Eca

**9. STANDARDS AND APPROVALS**

Cat 6, 500 MHz  
 Electrical performances and characteristics :  
 - ANSI/TIA 568.2-D  
 - EN 50173-1  
 - EN 50288-10-1  
 - ISO/IEC 11801  
 - IEC 61156-5