


SLC EL LED 3h 25m IR SC/C WM

Item number EN10030314
GTIN 4015120030314

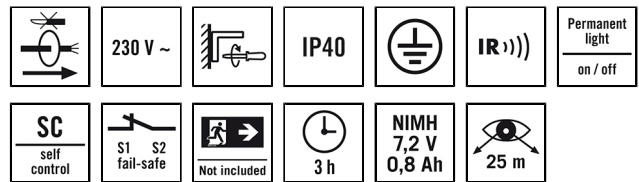

Product description

- Single battery emergency light with 3 hour emergency light duration and 25 m (DIN) viewing distance for wall mounting with self-control feature (SC) and fail-safe contact (opens if power fails)
- Additional remote control connection (F+, F-) for disabling emergency lighting when building is not in use
- Function test and self-control feature can be enabled using conventional test key or conveniently using the Mobil-SLi remote control
- The single-battery emergency light includes a continuous and a stand-by mode

Technical data

GENERAL

Device category	Escape sign light
User interface	IR remote control
Remote controllable	✓
Conformity	CE, RoHS, WEEE
Warranty	5 years

ATTACHMENT

Installation type	Wall mounting
Installation position	Wall

HOUSING

Dimensions	Length 300 mm x Width 70 mm x Height/ Depth 235 mm
Weight	806 g
Material	Aluminium
Protection type	IP40
Permissible ambient temperature	5 °C...+35 °C
Colour	aluminium appearance

ELECTRICAL VERSION

Protection class	I
Nominal voltage	230 V / 50 Hz
In-rush current	5,5 A / 394 µs
Leakage current	0,02 mA

LIGHT

Light emission	direct
Rated output	3 W
Energy efficiency class	A++ to A

EMERGENCY LIGHTING

Viewing distance (DIN EN)	25 m
Symbol height	125 mm
Light duration	3 h
Power supply system	Decentralised (single-battery)
Battery status indicator	by LED
Automatic testing	✓


SLC EL LED 3h 25m IR SC/C WM

Item number **GTIN**
 EN10030314 4015120030314


Accessories

Product designation	Item number	GTIN
SL REMOTE CONTROL	EN10017704	4015120017704
SLC SYMBOL 1-SIDE RIGHT	EN10030406	4015120030406
SLC SYMBOL 1-SIDE LEFT	EN10030413	4015120030413
SLC SYMBOL 1-SIDE DOWN	EN10030420	4015120030420
SLC SYMBOL 2-SIDE DOWN	EN10030437	4015120030437
SLC SYMBOL 2-SIDE RIGHT LEFT	EN10030444	4015120030444
SLC SYMBOL 1-SIDE TOP	EN10032639	4015120032639
ESY-Pen	EP10425356	4015120425356
SLC/SLD BATTERY NiMH 800mAh	EN10030956	4015120030956

Scale drawing



Circuit diagram

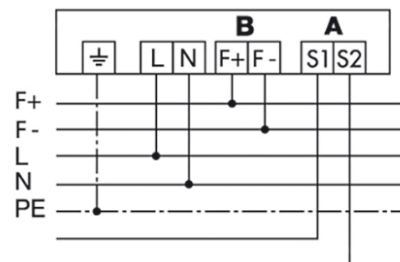

(A) Fail-safe contact.
 Series connection with other emergency lights.
 (B) Remote shutdown.