


RJ plugs

Cat. No(s): 0 517 01/02/03/04

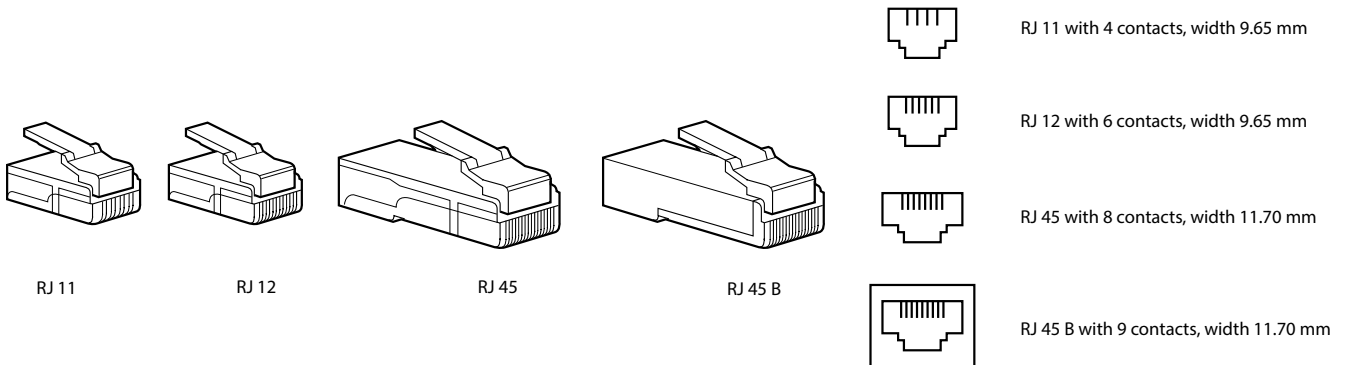

RJ 11

RJ 12

RJ 45

RJ 45 B

RJ 11 with 4 contacts, width 9.65 mm

RJ 12 with 6 contacts, width 9.65 mm

RJ 45 with 8 contacts, width 11.70 mm

RJ 45 B with 9 contacts, width 11.70 mm

1. GENERAL CHARACTERISTICS

RJ plugs for RJ 11/12/45 sockets for round cables


2. TECHNICAL CHARACTERISTICS

- Transparent polycarbonate body
- Fire resistance UL 94 V2
- 1.2 µm gold-plated contact


Name	Cat. No.	Maximum cable Ø	Maximum insulation Ø	Contacts
RJ 11	0 517 01	4.57	0.99	4
RJ 12	0 517 02	4.57	0.99	6
RJ 45	0 517 03	4.95	0.99	8
RJ 45 B	0 517 04	5.08	0.99	9

3. USUAL CONNECTIONS


RJ 45




4-pair TIA 568
Categories 3, 4 and 5




4-pair TIA 568 B
Categories 3, 4 and 5




RJ 11



2-pair USOC
Categories 3 and 4




RJ 12



3-pair USOC
Categories 3 and 4

Connection with RJ crimping tool Cat. No. 0 517 09




NB: Inserting an uncrimped plug in an RJ socket risks damaging both the plug and socket contacts.

NB: When making a Category 5 connection, the maximum pair-breakage distance should be kept between conductors.

4. ACCESSORIES

Plug can be covered with a protective sleeve Cat. No. 0 517 06/07



5. DIMENSIONS

