


Mosaic™

Bulkhead light for skirting lighting - antimicrobial*

Cat. No(s): 0 785 10



1. USE

Bulkhead light for skirting by LED.

This product is made of silver-ion based antimicrobial* material.

This technology eliminates bacteria, fungi and viruses without creating any immunisation or resistance effects (physical, rather than chemical, destruction).

Particularly suitable for healthcare establishments (hospitals, clinics, nursing homes, laboratories, waiting rooms, etc.) and more generally for areas subject to hygiene restrictions (industrial, shared and restaurant kitchens, waste, etc.).

This product offers an additional way of ensuring the non-proliferation of bacteria, fungi and viruses without interfering with cleaning protocols. The mechanism can be flush-mounted or surface-mounted.


To be equipped with plates.

Fixing with clips.

2. RANGE

| Description | White antimicrobial* |
|--|----------------------|
| Bulkhead pilot light - 2 modules To be installed in skirting trunking or bedhead strip. | 0 785 10 |

3. DIMENSIONS (mm)

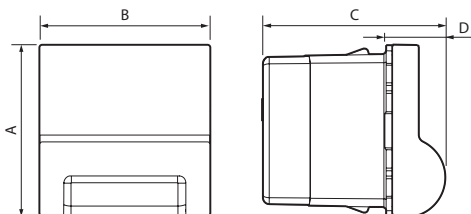

| A | B | C | D |
|----|----|----|----|
| 45 | 45 | 49 | 33 |

4. CONNECTION

Type of terminals: with screws

Terminal capacity: 1 x 2.5 mm² or 2 x 1.5 mm²

Tripping length: 8 mm

Screwdriver: flat 3.5 mm

philips n° 1

posidrive n° 1

mixed size 0

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact resistance: IK 04

Penetration against solid bodies and liquids: IP 41

■ 5.2 Material characteristics

Base: Polycarbonate

Cover plate: ABS White RAL 9003 + antimicrobial* surface treatment.

Halogen-free

UV resistant

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place



+ 650° C / 30 s for the other insulating part

■ 5.3 Electrical characteristics

Voltage: 230 V

Frequency: 50 / 60 Hz

■ 5.4 Lighting levels

| Power: | 1 W | 0,2 W |
|--------|---|---|
| |  |  |

Mesures taken at 30 cm from ground and 10 cm from wall:

- In high brightness position: 1700 cd/m²

- In low brightness position: 350 cd/m²

■ 5.5 Climatic characteristics

Storage temperature: - 10°C to + 70°C

Operating temperature: - 5°C to + 35°C

Bulkhead light for skirting lighting - antimicrobial*

6. CLEANING

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

■ 6.1 Resistance to cleaning products

Resistant to the following products: hexane (NF C 61-314), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

■ 6.2 Resistance to hospital grade cleaning products

Resistant to the following products: Anios, Surfanios, Bactilysine, diluted hydrogen peroxide (35%).

Caution: Always test before using other special cleaning products.

7. STANDARDS AND APPROVALS

Comply with installation and manufacturing standards.

See e-catalogue.

* Contains a silver compound to antagonize the growth of bacteria on the surface.