

Add-on modules DX³ 40-63A for MCBs DX³ 1 module per pole

Cat N°(s): 410 401, 402, 410, 411, 413, 414, 424 à 435, 446 à 500, 508, 509, 511, 512, 520 à 560




CONTENTS	PAGES
1. Description, Use.....	1
2. Product range	1
3. Overall dimensions.....	1
4. Preparation – Connection	2
5. General characteristics.....	3
6. Compliance and approvals.....	4
7. Characteristics curves.....	4
8. Auxiliaries and accessories	4

1. DESCRIPTION - USE

Add-on module, for MCB DX³ ≤ 63 A, 1 module per pole width, breaking capacity 6000A/10kA, 10000A/16kA, or 25kA. For protection of people against direct and indirect electric shocks and protection of installations against insulation faults.

Symbol:



Technology:

. Electromagnetic residual current operating by sensitive relay

2. PRODUCT RANGE

Number of poles:

. 2 poles, 3 poles et 4 poles.

Width:

. Double pole – 2 modules (2 x 17,8 mm = 35,6 mm).
. Triple and Four pole – 3 modules (3 x 17,8 mm = 53,4 mm).

Rated currents:

. 40 / 63 A.

Sensitivity - Operating time:

. 30 mA instantaneous.
. 100 mA instantaneous
. 300 mA instantaneous or delayed tripping.
. 1A delayed tripping.

Types:

. AC: sinusoidal AC fault currents.
. A (Same as the AC type + currents with or without DC component).
. F: (Same as the A type + Composite currents applied both suddenly and slowly, pulsed unidirectional currents overlapped with continuous currents without ripple and immunity against unwanted tripping).

2. PRODUCT RANGE (continued)

Types (continued):

. S (AC-S, A-S or F-S): differential selective or delayed, operating with an intentional delay (40ms).


Rated Voltage / Frequency:

. Double pole 230 V ~, 50 Hz with standard tolerances.
. Triple and four pole 400 V ~, 50 Hz with standard tolerances.

Operating voltage ~ 50 Hz with standard tolerances :

U	Duble pole	Triple and four pole
U mini	170 V ~	250 V ~
U maxi	253 V ~	440 V ~

3. OVERALL DIMENSIONS

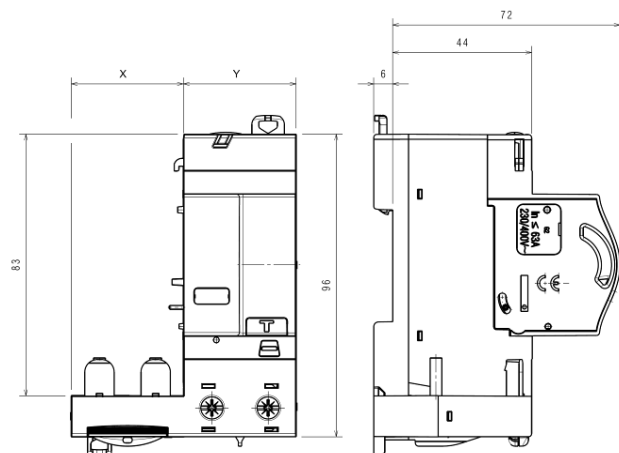

N° of poles	"X"	"Y"
2P	35,6 mm	35,6 mm
3P	53,4 mm	53,4 mm
4P	71,2 mm	53,4 mm

Add-on modules DX³ 40-63A for MCBs DX³ 1 module per pole

Cat N°(s): 410 401, 402, 410, 411, 413, 414, 424 à 435,
446 à 500, 508, 509, 511, 512, 520 à 560

4. PREPARATION - CONNECTION

Assembling:

. On the right side of the MCBs DX³ up to 63 A. Joins to the circuit breaker by plastic clamps and tightening of connections in the downstream terminals of the MCB.

Fixing:


. On symmetrical IEC/EN 60715 rail or DIN 35 rail.

Power supply:

. From the top trough the associated MCB or from the bottom directly on the add-on module.

Operating position:

. Vertical Horizontal Upside down On the side



Screw terminals:

- . Terminals protected against accidental contact (IP20).
- . Cage terminals, with release and captive screw
- . Terminal depth: 14 mm.
- . Stripping length recommended: 11 mm
- . Screw head: Mixed, Slotted and Pozidriv n°2.
- . Recommended tightening torque: 3 Nm.
- . The screw terminals are separated by built-in shields.

Connectable section:

- . In the power terminals in the lower part of the product.
- . Copper cable.

	Without ferrule	With ferrule
Rigid cable	1 x 35 mm ²	-
Flexible cable	1 x 25 mm ²	1 x 25 mm ²

Recommended tools:

- . For the terminals: screwdriver Pozidriv n°2 or flat screwdriver 5,5 mm (6,5 mm maximum).
- . For fixing on the DIN rail: flat screwdriver 5 mm (from 4 to 5 mm).

Manual actuation of the add-on module:

- . By the 2-position ergonomic handle of the associated MCB:
 - I / ON: Closed circuit.
 - 0 / OFF: Opened circuit.

Contacts status display:

- . By marking of the associated MCB handle:
 - "O-Off" white on a green background = contacts opened.
 - "I-On" white on a red background = contacts closed.

Display of differential fault trip:

- . Yellow mechanical signaller into the window on front-side marking zone.


Labelling:

- . Circuit identification by insertion of a label in the label holder of the associated MCB.

5. GENERAL CHARACTERISTICS

Front side marking:

- . By permanent ink pad printing and laser marking.

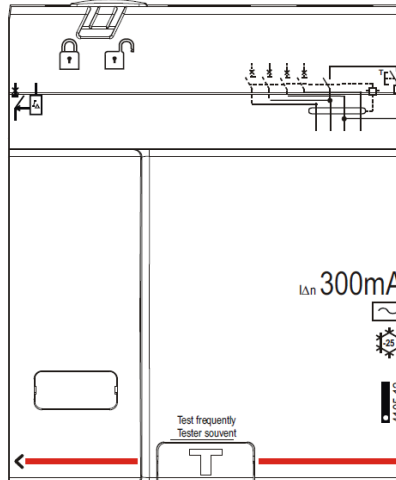

"Test" key operating voltages:

U test	Duble pole	Triple and four pole
U mini	170 V ~	250 V ~
U maxi	253 V ~	440 V ~

For the wiring of a four-pole differential block in a three phase network without neutral, make sure to properly wired three consecutive poles to supply the test key (connected on the two central poles).

Neutral system:

- . IT – TT – TN.

Residual breaking capacity I_{Δm}:

- . In accordance with standard IEC/EN 61009-1 (I_{Δm}: short-circuit to ground) I_{Δm} = 6000A

Insulation rated voltage:

- . U_i = 500 V in accordance with standard IEC/EN 61009-1

Pollution degree:

- . 2.

Electric strength:

- . 2500 V

Pulse rated voltage:

- . U_{imp} = 4 kV (wave 1.2 / 50 μs).

Protection against unwanted tripping:

- . Damped recurrent wave – 0.5 μs/10kHz : 200A for all types
- . Held to the wave 8/20 μs :

Type	AC	AC-S	A	A-S	F	F-S
intensity	250A	5000A	250A	5000A	3000A	5000A

Add-on modules DX³ 40-63A for MCBs

DX³ 1 module per pole

Cat N°(s): 410 401, 402, 410, 411, 413, 414, 424 à 435, 446 à 500, 508, 509, 511, 512, 520 à 560

5. GENERAL CHARACTERISTICS (continued)

Protection class:

- Protection index of terminals against solid and liquid bodies:
IP 20 (according to IEC/EN 60529 et NF C 20-010).
- Protection index of the box against solid and liquid bodies:
IP 40 (according to IEC/EN 60529 et NF C 20-010).
- Class II compared to conductive parts.
- Protection index against mechanical shocks:
IK 02 (according to EN 50102 et NF C 20-015).

Power dissipated and impedance average per pole at In:

In ≤ 40A

In	Double-pole		Triple/four-pole	
	Z (mΩ)	P (W)	Z (mΩ)	P (W)
6 A	1.03	0.04	1.95	0.07
10 A	1.03	0.1	1.95	0.19
16 A	1.03	0.26	1.95	0.5
20 A	1.03	0.41	1.95	0.78
25 A	1.03	0.64	1.95	1.2
32 A	1.03	1.06	1.95	2
40 A	1.03	1.64	1.95	3.12

In ≤ 63A

In	Double-pole		Triple/four-pole	
	Z (mΩ)	P (W)	Z (mΩ)	P (W)
6 A	0.43	0.02	0.55	0.02
10 A	0.43	0.04	0.55	0.06
16 A	0.43	0.11	0.55	0.14
20 A	0.43	0.17	0.55	0.22
25 A	0.43	0.27	0.55	0.34
32 A	0.43	0.44	0.55	0.56
40 A	0.43	0.68	0.55	0.88
50 A	0.43	1.07	0.55	1.37
63 A	0.43	1.7	0.55	2.17

Beware, to have the total power dissipated by the RCD these powers are to be added to those of the associated MCB.

Enclosure material:

- Polycarbonate.
- Characteristics of this material: self extinguishing, heat and fire resistant in accordance with standard IEC/EN 61009-1, glow-wire test at 960°C for external parts made of insulating material necessary to retain in position current-carrying parts and parts of protective circuit (650°C for all other external parts made of insulating material).

5. GENERAL CHARACTERISTICS (continued)

Calorific value :

	Double-pole	Triple-pole	Four-pole
MJ	2.30	2.54	3.11

Packed volume:

- Double pole: 0,9 dm³ per device.
- Triple pole: 1,3 dm³ per device.
- Four pole: 1,5 dm³ per device.

Average weight per device:

In ≤ 40A

- Double pole: 0,17 kg
- Triple pole: 0,21 kg
- Four pole: 0,25 kg

In ≤ 63A

- Double pole: 0,21 kg
- Triple pole: 0,25kg
- Four pole: 0,29 kg

Ambient operating temperature:

- Min. = -25°C. Max. = +70°C

Ambient storage temperature:

- Min. = -40°C. Max. = +70°C

Derating according to ambient temperature :

- Reference temperature: 40 °C in accordance with standard IEC/EN 61009-1.
- No derating of the differential block depending on the ambient temperature between - 25 °C and +40 °C.
- Derating between + 40 °C to + 70 °C :

Temperature	40 °C	50 °C	60 °C	70 °C
% of In	100 %	95 %	90 %	85 %

Resistance to sinusoidal vibrations:

- in accordance with standard IEC 60068-2-35.
- Axis : x, y, z.
- Frequency range: 5÷100 Hz ; duration 90 min.
- Displacement (5÷13,2 Hz) : 1mm
- Acceleration (13,2÷100 Hz) : 0,7g (g=9,81 m/s²).

Influence of the altitude :

	2000 m	3000 m	4000 m	5000 m
Dielectric strength	3000 V	2500 V	2000 V	1500 V
Max operating voltage	400 V	400 V	400 V	400 V
Derating at 30°C	none	none	none	none

Specific use:

- Appropriate to be used in humid environment and polluted by chlorine (pool-type)

Mechanical endurance:

- 20000 operations without load.
- 10000 operations with load.
- 750 differential tripping operations by the Test key.
- 750 differential tripping operations for fault current.

Add-on modules DX³ 40-63A for MCBs DX³ 1 module per pole

Cat N°(s): 410 401, 402, 410, 411, 413, 414, 424 à 435,
446 à 500, 508, 509, 511, 512, 520 à 560

6. COMPLIANCE- APPROVALS

In accordance with standards:

- . IEC/EN 61009-1.
- . IEC/EN 60947-2.
- . IEC/EN 62423 (F type)

Communautaires directives:

- . 73/23/CEE + 93/68/CEE (DBT), 83/336/CEE + 92/31CE + 93/68/CEE (EMC) e 91/338 / CEE of 06/18/91 e of 27/07/04 decree 94-647.

Environment respect – Compliance with CEE directives:

- . Compliance with Directive 2002/95/CE called "RoHS" Which prohibits the use of hazardous substances such as lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) and polybrominated diphenylethers (PBDE) from 1 July 2006.

Plastic materials :

- . Halogen-free plastic materials.
- . Marking of parts according to ISO 11469 and ISO 1043.


Packaging:

- . Design and manufacture of packaging in accordance with decree 98-638 and Directive 94/62/EC, subsequent modifications and additions.

7. CURVES :

Residual current operating characteristic:


- . Average tripping time depending on the intensity of the fault current.
- . Sensitivities 30 mA, 100mA et 300 mA instantaneous for all types.

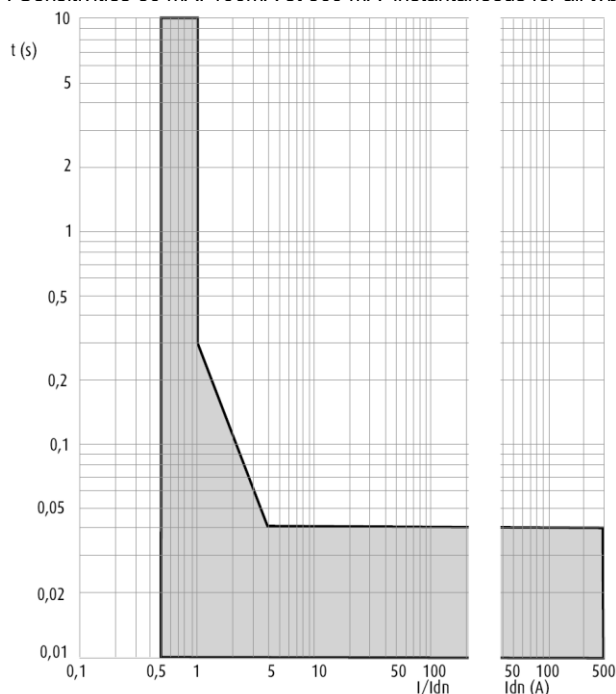


7. CURVES (continued)

Residual current operating characteristic

- . Average tripping time depending on the intensity of the fault current.
- . Sensitivities 300 mA selective \leq for all types.

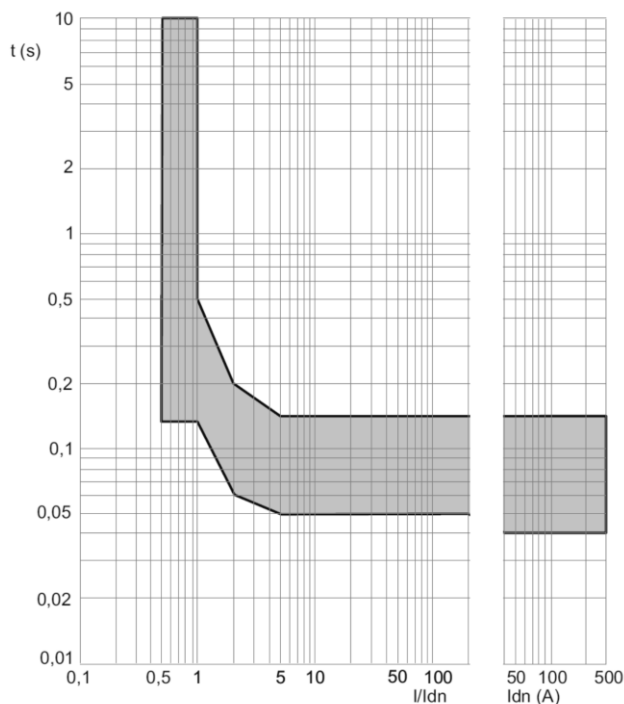

- . Sensitivities 1000 mA selective \leq for all types.

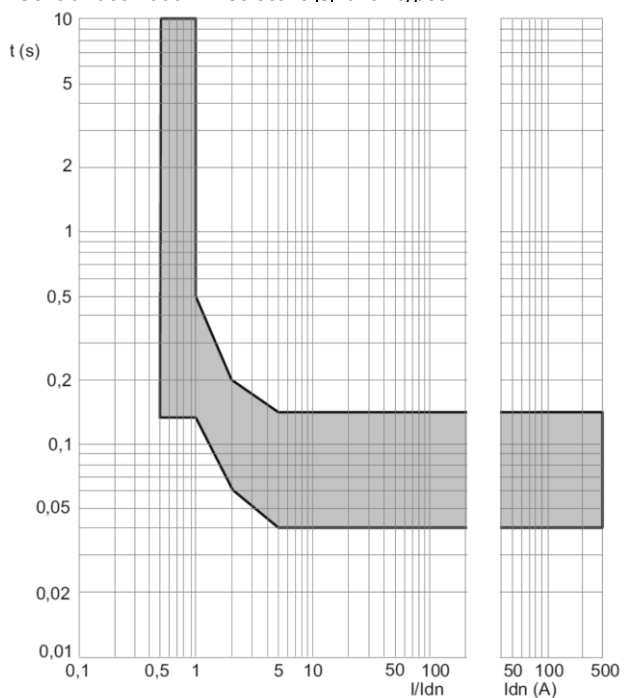

8. AUXILIARIES - ACCESSORIES

Installation software:

- . XL PRO³.