



# Arteor™ Control for hotel equipment


Cat. No(s): 5 722 01/02/19/20 - 5 727 01/02/19/20  
 5 732 19/20/22/23/24/25/34/35/36/37  
 5 737 19/20/22/23/24/25/34/35/36/37



5 722 01 - 5 727 01



5 732 22 - 5 737 22



5 732 37 - 5 737 37

## 1. USE

Control (up, down, stop) for awnings, roller shutters, etc.  
 Double two-way switch for direct control of a motor (mechanism with fixed positions).  
 The mechanisms can be flush-mounted or surface-mounted.


## 2. RANGE

	Description	White	Magnesium
	Curtain switch Center retract Square - 1 module	5 722 01	5 727 01
	Curtain switch Center OFF Square - 1 module	5 722 02	5 727 02
	Double push for electric shutter Square - 2 modules	5 722 19	5 727 19
	Double switch for electric shutter Square - 2 modules	5 722 20	5 727 20
	Double push for electric shutter Round - 2 modules	5 732 19	5 737 19
	Double switch for electric shutter Round - 2 modules	5 732 20	5 737 20
	Double switch Roller blinds marking Square - 2 modules	5 732 22	5 737 22
	Double switch Roller blinds marking Round - 2 modules	5 732 23	5 737 23
	Double push Roller blinds marking Square - 2 modules	5 732 24	5 737 24
	Double push Roller blinds marking Round - 2 modules	5 732 25	5 737 25

## 2. RANGE (continued)

	Description	White	Magnesium
	Double switch Curtain marking Square - 2 modules	5 732 34	5 737 34
	Double switch Curtain marking Round - 2 modules	5 732 35	5 737 35
	Double push Curtain marking Square - 2 modules	5 732 36	5 737 36
	Double push Curtain marking Round - 2 modules	5 732 37	5 737 37

## 3. OVERALL DIMENSIONS (mm)

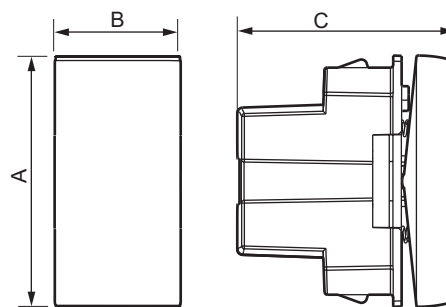


	A	B	C
1 module	45	22.5	39
2 modules	45	45	42

#### 4. CONNECTION


Number of terminals: 3  
 Type of terminals: with screws  
 Terminal capacity: 2 x 1.5 mm<sup>2</sup> or 1 x 1.4 mm<sup>2</sup>  
 Stripping length:  
 - 8 mm for 5 722 01/02 - 5 727 01/02  
 - 10 mm for 5 722 19/20- 5 727 19/20  
     5 732 19/20/22/23/24/25/34/35/36/37  
     5 737 19/20/22/23/24/25/34/35/36/37  
 Type of screwdriver: flat-blade screwdriver 4 mm up to 5.5 mm

##### ■ 4.1 Control of an electronic control box



For: 5 722 01/19 - 5 732 19/24/25/36/37  
 5 727 01/19 - 5 737 19/24/25/36/37

##### ■ 4.2 Direct control of a motor

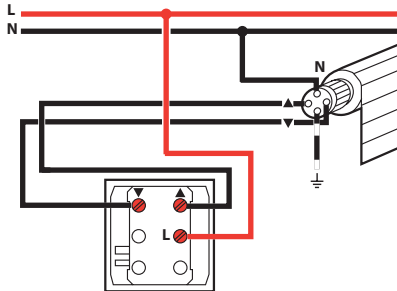

For: 5 722 02/20 - 5 732 20/22/23/34/35  
 5 727 02/20 - 5 737 20/22/23/34/35

#### 5. OPERATION

Used for direct and individual control of a roller shutter motor.  
 Fitted with two switches linked by a system preventing simultaneous pressing of both switches STOP control is obtained by opening both switches.

#### 6. TECHNICAL CHARACTERISTICS

##### ■ 6.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 40 (mounted)  
 IP 20 (alone)

Impact test: IK 04

##### ■ 6.2 Material characteristics

Rocker: Polycarbonate  
 Base: Polycarbonate  
 Self-extinguishing:  
 + 850° C / 30 s for insulating parts holding live parts in place.  
 + 650° C / 30 s for other parts made of insulating materials.

##### ■ 6.3 Electrical characteristics

Voltage: 250 Vac  
 Current: 10 A  
 6 A for Cat. No(s) 5 722 01 - 5 727 01

##### ■ 6.4 Climatic characteristics

Storage and operating temperatures: - 20° C to + 40° C

#### 7. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents: Hexane (EN-60669-1),  
 Methylated spirits, Soapy water, diluted ammonia, diluted pure bleach  
 10%, Glass cleaning substance, Pre-impregnated wipes.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.