


## Belanko™ 32 A double pole switches

Cat. No.(s): 6 170 74 - 6 173 74 - 6 174 74



### 1. USE

High capacity double pole switch for the control of fixed appliances eg. cooker ovens, showers or air-conditioning units. Only available with neon «power on» indicator.

Complete delivered.

For flush-mountin or surface-mounting box.


Supplied with 2 screws M3.5 for BS boxes.

35 mm recommended depth back boxes.

### 2. RANGE

Description	White	Dark Grey	Brown
1-gang 1-way switch + red neon indicator	6 170 74	6 173 74	6 174 74

### 3. OVERALL (mm)

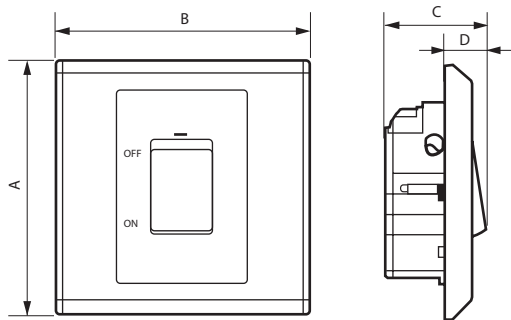

A	B	C	D
86	86	34.5	14

Distance of installation hole: 60.3 mm

### 4. CONNECTION

Terminal capacity L, N + E: 1 x 16 mm<sup>2</sup>

1 x 10 mm<sup>2</sup>

2 x 6 mm<sup>2</sup>

3 x 4 mm<sup>2</sup>

Recommended screwdriver size: 5.5 mm flat blade

Recommended stripping length: 24 mm for L/N

8 mm for earth

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Impact tests: IK 04

Protection against solid bodies and liquids: IP 40

#### ■ 5.2 Material characteristics

Thermoplastic with glossy finish (White)

Colour: White T084: PC

Dark Grey: PC painted

Brown: PC painted

Rear: Grey

Rocker: PC White

Self-extinguishing:

+ 850°C / 30 s for insulating parts holding live parts in place.

+ 650°C / 30 s for other parts made of insulating materials.

#### ■ 5.3 Electrical characteristics

Voltage: 250 V~

Current: 32 A

#### ■ 5.4 Climatic characteristics

Storage temperature: - 10°C to + 70°C

Operating temperature: - 5°C to + 35°C

### 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

**Caution:** An initial test is required for the use of other special maintenance products.

### 7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.

See e. catalogue.