


Belanko™ Bell push 2 A

Cat. No(s): 6 171 16




1. USE

Push-button complete delivered.
 For surface or flush-mounting box.
 Fixing with screws.

2. RANGE

6 171 16	Bell push with small rocker - Architrave
----------	--

3. OVERALL DIMENSIONS (mm)

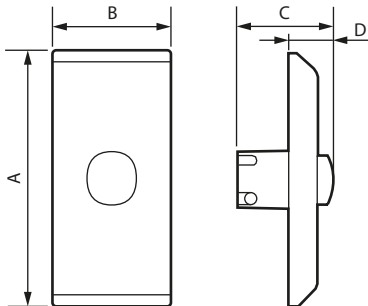

Cat. No	A	B	C	D
6 171 16	86	34	32	15

4. CONNECTION

Type of terminals : with screws
 Terminal capacity: 4 x 1 mm² - 4 x 1.5 mm² - 2 x 2.5 mm² - 1 x 4 mm²
 Stripping length: 8 mm
 Screwdriver: 4 mm flat blade
 Compatible with flexible or rigid cables

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04
 Penetration by solid bodies/liquids: IP 40

■ 5.2 Material characteristics

Thermoplastic with glossy finish
 Colour: White T084
 Halogen free
 UV resistant

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.
 + 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 V~
 Current: 2 A
 Frequency: 50/60 Hz

■ 5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 50° C

6. CLEANING

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistance to the following cleaning substances:
 Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia,
 Diluted pure bleach 10%, Glass cleaning product.

Caution: An initial test is required for the use of other special maintenance products.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 See e.catalogue.