


## MyHOME® Play Double ON/OFF radio controls for lights

Cat. No(s): 0 672 24 - 0 746 86 - 6 651 06 - 7 520 82



0 672 24


### 1. USE

Wireless control for two ON/OFF light functions.  
 Used to send a command to one or more radio receiver switches.  
 Can be used as a two-way switch or to control a group.  
 Can be combined with other wiring accessory products in a multi-gang unit.  
 For fixing directly on the wall without a flush-mounting box.  
 Remote control format.

### 2. RANGE

	Description	Colour	Cat. No.
	Céliane control supplied with support To be fitted with a Céliane cover plate and a Céliane plate	-	0 672 24
	Niloé control supplied with cover plate and support To be fitted with a plate	White	6 651 06
	Mosaic control supplied with cover plate and support To be fitted with a plate	White	0 746 86
	Valena control supplied with support To be fitted with a Valena cover plate and a Valena plate	-	7 520 82

### 3. OVERALL DIMENSIONS (mm)

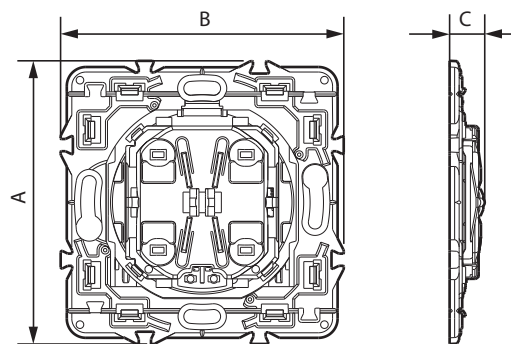

Cat. Nos.	A	B	C
0 672 24	74	74	9
6 651 06	76	76	13
0 746 86	74	74	11
7 520 82	75	75	9

### 4. CONNECTION

No connections (battery powered).

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Impact test: IK 04

Penetration by solid bodies/liquid: - IP 40, product assembled  
 - IP 20, without rocker

#### ■ 5.2 Material characteristics

- Halogen-free

- UV resistant

Rocker plate material:

- 6 651 06: ABS white RAL 9003

- 0 746 86: PC white RAL 9003

Material of the mechanism with support:

- 7 520 82: PC reinforced with 10% glass

Self-extinguishing:

+ 850° C/30 s for insulating parts holding live parts in place

+ 650° C/30 s for other parts made of insulating materials

## 5. TECHNICAL CHARACTERISTICS *(continued)*

### ■ 5.3 Electrical characteristics

Powered by a CR2032 - 3 V lithium battery (supplied)  
2.4 GHz Radiofrequency band (16 channels) - Byte rate: 250 KB/s  
Self healing MESH network with high security level (AES128) according to IEEE 802.15.4 (LR-WPAN) standard.

### ■ 5.4 Climatic characteristics

Storage and operating temperatures: + 5° C to + 45° C

## 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover or trichloroethylene.

Maintenance with the following products: hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10% or window-cleaning products.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

The plates must not be painted.

## 7. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.  
Refer to e-catalogue.