



Synergy™
Blanking plate
Metalclad

Cat. No(s): 7 338 95/96



7 338 95



7 338 96


1. USE

Blanking plates for surface-mounting.
 Fixing with screws.

2. RANGE

Blanking plate - 1-Gang	7 338 95
Blanking plate - 2-Gang	7 338 96

3. OVERALL DIMENSIONS (mm)

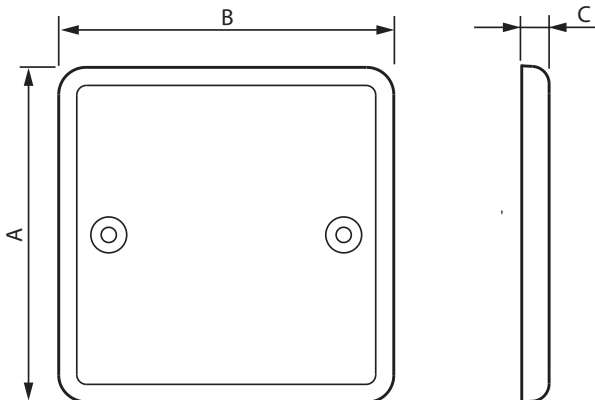

Cat. Nos	A	B	C
7 338 95	86	86	7
7 338 96	86	146	7

4. TECHNICAL CHARACTERISTICS

■ **4.1 Mechanical characteristics**

Impact tests: IK 08
 Penetration by solid bodies/liquids: IP 20

■ **4.2 Material characteristics**

Front plate: Grey epoxy coated steel
 Halogen free
 UV resistant

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.

■ **4.3 Climatic characteristics**

Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 35° C

5. CLEANING

Clean the surface with a cloth or soapy water.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: An initial test is required for the use of other special maintenance products.

6. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 See e.catalogue.