


Technical data

Build-in devices "EVESYS"


Technical data	
Rated voltage U_n	230/400V AC, 24V DC
Rated current I_n	16A, 25A
Rated frequency f_n	50/60 Hz
Terminals	1x6mm ² / 2x2,5mm ² , max 1Nm
Electrical insulation	>3mm contact space
Rated making and breaking capacity	1,25In / 1,1 Un, cosφ=0,6
Rated conditional short-circuit current	10kA, 400V, cosφ=0,6 (for Switch)
Degree of protection	IP20
Width of the switch	18mm
Standards	IEC/EN 60947-1, IEC/EN 60947-3

Switch




SG 116 **SG 216** **SG 316** **SG 416**


Switch with control light



SLG 116 **SLG 216** **SLG 316**




SG 125 **SG 225** **SG 325** **SG 425**



SLG 125 **SLG 225** **SLG 325**

Change-over switch




ISG 116 **ISG 216**

Center-off Change-over Switch



SSG 116 **SSG 216**



ISG 125 **ISG 225**




SSG 125 **SSG 225**

Push-button




TG 216


Signal light




TLG 216

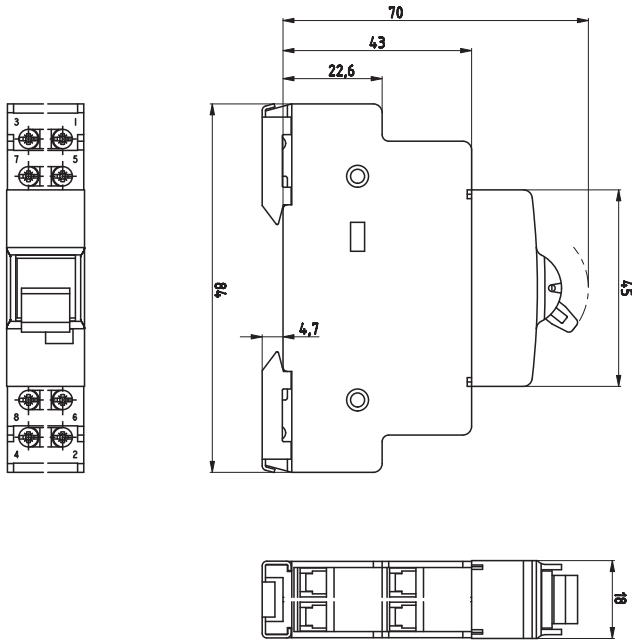


Switch, Switch with control light, Change-over switch, Push-button, Push-button with control light, Signal light

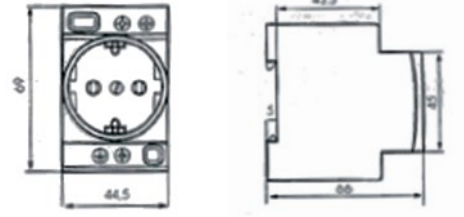


DIN socket

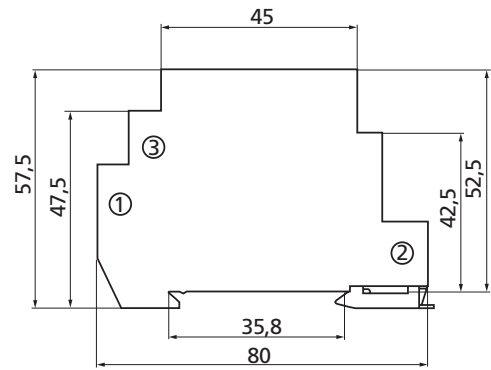



Bell/Buzzer

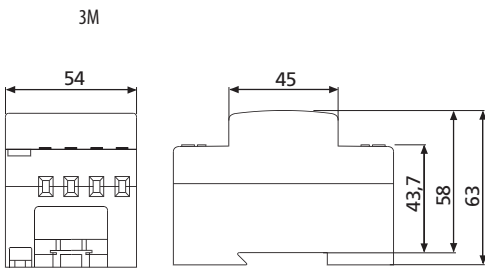

Bell transformer type 3M

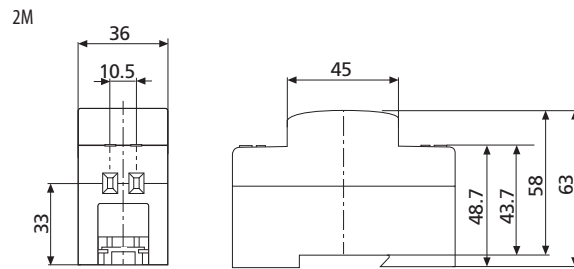

Bell transformer type 2M

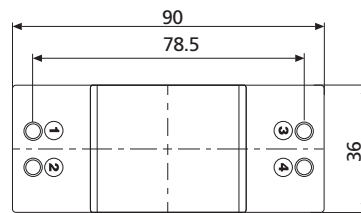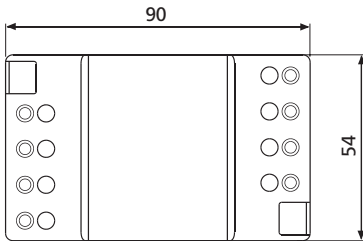

Technical data				
	SON H-1R	SON H-1G	SON H-3R	SON H-3K
Rated voltage U_n	240V AC		3x240V AC	
Voltage tolerance	-25%...+10%			
Rated frequency f_n	50/60Hz			
Power consumption	0,267W (240V AC)		1,04W (240V AC)	
Diode colour	1 red	1 green	3 red	1 red, 1 yellow, 1 green
Protection class	Casing: IP40, terminals IP20			
Humidity	95% (without condensation)			
Material	Self-extinguished material UL94-V0			
Cross section	1-4 mm ²			
Torque	0,6 Nm			
Montage	TH35			
Width	1 Modul			
Standards	IEC EN 61000-3-2; IEC EN 61000-4			