


Synergy™
Fused connection units unswitched
Authentic

Cat. No(s): 8 330 30/31/32/33 - 8 332 30/31/32/33 - 8 334 30/31/32/33



8 33x 30



8 33x 33

1. USE

British Standards of fused connection units unswitched.
 Complete delivered with compact mechanisms for maximum wiring space and slim front plates.
 For flush-mounting or surface-mounting.
 Fixing with screws.

2. RANGE

Fuse connection units unswitched without cord outlet

8 330 30	● Brushed stainless steel
8 332 30	● Polished stainless steel
8 334 30	● Glossy gold

Fuse connection units unswitched with blue LED power indicator

8 330 31	● Brushed stainless steel
8 332 31	● Polished stainless steel
8 334 31	● Glossy gold


Fuse connection units unswitched with cord outlet

8 330 32	● Brushed stainless steel
8 332 32	● Polished stainless steel
8 334 32	● Glossy gold

Fuse connection units unswitched with blue LED power indicator + cord outlet

8 330 33	● Brushed stainless steel
8 332 33	● Polished stainless steel
8 334 33	● Glossy gold

3. OVERALL DIMENSIONS (mm)

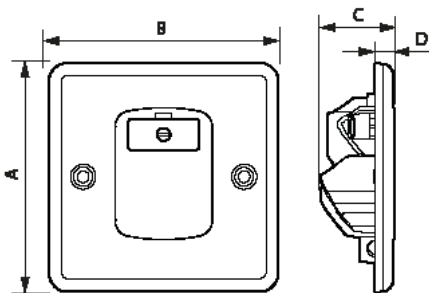

A	B	C	D
86	86	30	7.5

4. CONNECTION

Type of terminals : with screws
 Terminal capacity: 3 x 2,5 mm² - 2 x 4 mm² - 2 x 6 mm²
 Stripping length: 12 mm
 Compatible with flexible or rigid cables.

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics

Impact tests: IK 01
 Penetration by solid bodies/liquids: IP 20

5.2 Material characteristics

Plates:
 - BSS: austenitic Brushed Stainless Steel - non magnetic - grade 304 L
 - PSS: Polished Stainless Steel + rust resistance
 - GG: Stainless Steel + rust resistance

Mechanism housing: PC

Support: Metal

Halogen free

UV resistant

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.
 + 650° C / 30 s for other parts made of insulating materials.

5.3 Material characteristics

Voltage: 250 V~
 Current: 13 A
 Frequency: 50/60 Hz

5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.
 Resistance to the following cleaning substances:
 Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning product.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 See e.catalogue.