

Description

D45 System zamak nameplate /targa module to be installed side by side to the digital call entrance panel 322012 to insert the list of residents or customised messages.

Easy insertion / replacement of nameplates.


Flush mounted installation (flush mounted box supplied with the product). White night backlit. Protection degree : IP54, protection index against mechanical impact : IK07.

Related items

322011 Digital call entrance panel with addresses list

Technical data


Power supply:	30 Vdc
Stand by absorption:	≤ 5 mA @ 30 V
Max operating absorption:	≤ 25 mA@30 V
Operating temperature:	(-25) – (+55) °C
Protection index:	IP54
Protection against mechanical impact:	IK07

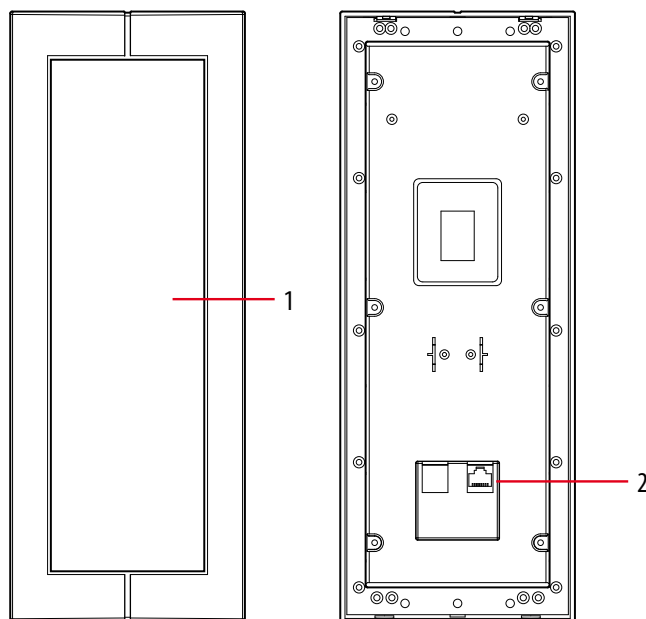**Legend**

1. Information area with label, label cover and lens
2. RJ45 connector for the connection to the main entrance panel


Dimensional data

Targa module

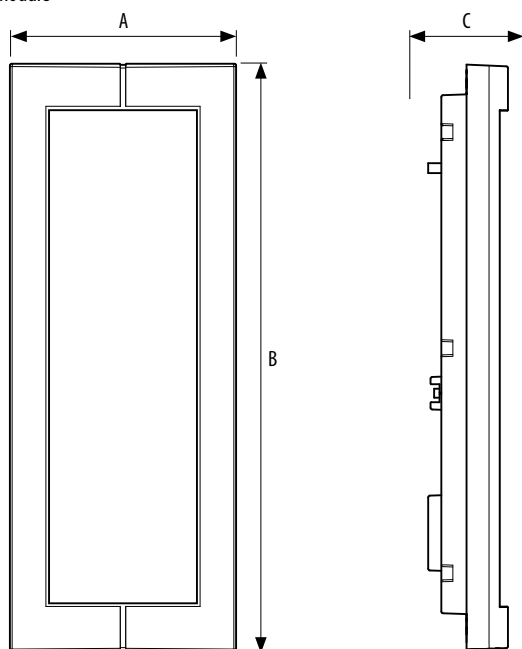

A (mm)	B (mm)	C (mm)
125	325	44,5

Flush mounting box

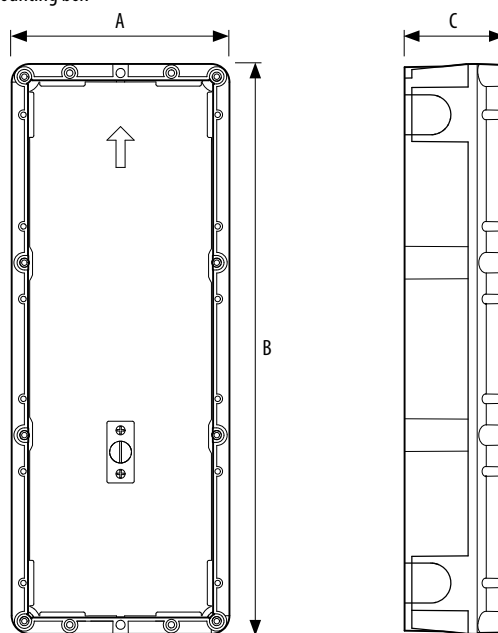

A (mm)	B (mm)	C (mm)
120	314	55