

Technical Data Sheet

Description:	Main Line Branch Terminal 25 mm ² "double block" – 1 pole (Al/Cu)
Construction:	Model C – all-side fingersafe, modular system
Item no. :	080120-x-3

15.01.2018

Remarks: The product is compliant with the EC ROHS directives

Standards: IEC 60947-7-1, IEC 61238-1 (Class A)








Nominal Voltage: 1.000 V AC / 1.000 V DC

Nominal current: Cu 152 A (2x16mm²); 101 A (1x25mm²) as per IEC 60947-7-1
Al 100 A (1x25mm²)* as per IEC 61238-1 (Class A)

* Approved with Reko SFS 4880 (manufactured by Reka Cables Ltd)




Power loss: Tested by SGS Fimko Ltd (FI) (see chart 1)

	4 x 25 mm ² (round conductor)			4 x 16 mm ² (round conductor)		
	Cu		Al	Cu		Al
						
25 mm ²	2,5 Nm	-	4 Nm	-	-	-
16 mm ²	2,5 Nm	2,5 Nm	4 Nm	2,5 Nm	-	4 Nm
10 mm ²	2,5 Nm	2,5 Nm	-	2,5 Nm	2,5 Nm	-
6 mm ²	2,5 Nm	2,5 Nm	-	2,5 Nm	2,5 Nm	-
4 mm ²	2,5 Nm	2,5 Nm	-	2,5 Nm	2,5 Nm	-
2,5 mm ²	2,5 Nm	2,5 Nm	-	2,5 Nm	2,5 Nm	-
1,5 mm ²	-	2,5 Nm	-	-	2,5 Nm	-
stripping length	19 mm			19 mm		
screw	M6 (+/- PZ2)			M6 (+/- PZ2)		

Materials:
Terminal body: brass (CuZn39Pb2) 3-4µm Ni / 7-10µm Sn
Housing: PA 6 (Halogen-free)
Screws: steel Zn thick-film passivated

Flame resistance: Self-extinguishing

Mechanical data: Dimensions: width x height x depth (mm): 49,9 x 49,3 x 55,4

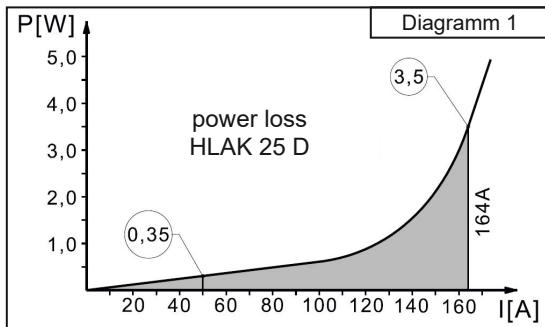

Design				
Basic housing colour – light grey RAL 7035				
Part no.	Design	Cover colour	PU	GTIN (EAN)
080120-0-3	L G	light grey RAL 7035	2	4051589012034
080120-1-3	N	light blue RAL 5012	2	4051589012133
080120-2-3	PE	yellow-green RAL 6018	2	4051589012232
080120-3-3	L B	clay brown RAL 8003	2	4051589012331
080120-4-3	L S	jet black RAL 9005	2	4051589012430