


DATA SHEET

ESYLUX

SUN PL TR 2700 850 BK

Item number EL10810329
GTIN 4015120810329

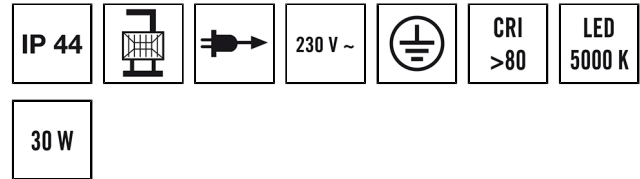

Product description

- LED spotlight with high-quality aluminium die-cast housing, with 5 m H07RN-F rubber-insulated flexible cable and plug with earthing contact
- 30 W LED luminous efficiency corresponds to 155 W light bulb, light colour approx. 5000 K white
- High light yield of 90 lm/W, excellent colour rendering index Ra 80

Technical data

GENERAL

Device category	Portable light
Remote controllable	–
Conformity	CE, RoHS, WEEE
Warranty	3-year

ATTACHMENT

Installation type	Free standing
Installation position	Floor
Type of connection	Earthed plug
Connector	Earthed plug

HOUSING

Dimensions	Length 230 mm x Width 240 mm x Height/Depth 390 mm
Weight	2840 g
Material	Aluminium and UV-stabilised plastic
Protection type	IP44
Permissible ambient temperature	-25 °C...+50 °C
Colour	Black, similar to RAL 9005

ELECTRICAL VERSION

Protection class	I
Nominal voltage	230 V / 50 Hz
In-rush current	19,1 A / 104 µs
Leakage current	0,059 mA

LIGHT

Diffusor	transparent
Light emission	direct
Beam angle	110 °
Flicker factor	<20 %
Rated output	30 W
Luminous Flux (light)	2700 lm
Luminous efficacy	90 lm/W
Colour temperature	5000 K
Colour rendering index Ra	> 80
L70B10 lifetime at 25 °C	45000 h
Life time L70B50 at 25 °C	45000 h
Life time L80B10 at 25 °C	30000 h
Life time L80B50 at 25 °C	30000 h
Life time L90B10 at 25 °C	15000 h
Life time L90B50 at 25 °C	15000 h
Energy efficiency class	A++ to A

DATA SHEET




SUN PL TR 2700 850 BK

Item number **GTIN**
EL10810329 4015120810329

Accessories

Product designation	Item number	GTIN
PL SUN TELESCOPIC STAND	EL10810503	4015120810503

Scale drawing



Light distribution

