


## BASIC AFL TR 1000 840 MD WH

**Item number** EL10810923  
**GTIN** 4015120810923

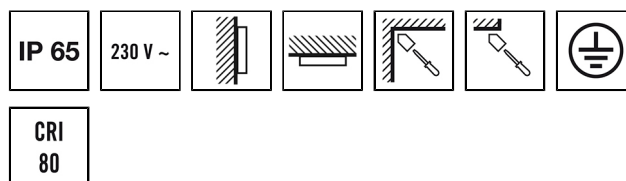

### Product description

- LED floodlight with compact aluminium housing for unobtrusive installation, white
- 10 W light output with 4000 K light colour (neutral white)
- Excellent efficiency of approx. 100 lm/W

### Technical data

GENERAL	
Device category	Floodlights
Product information	The floodlights are intended for use outdoors. If used inside (e. g. below the ceiling) the heat cannot be sufficiently discharged where necessary.
Remote controllable	–
Conformity	CE, RoHS, WEEE
Warranty	3-year
ATTACHMENT	
Installation type	Surface mounting
Installation position	Wall
Type of connection	Open end
Connectable wire cross section	0,75 - 2,50 mm <sup>2</sup>
Length of cable	0,8 m
HOUSING	
Dimensions	Length 160 mm x Width 170 mm x Height/Depth 58 mm
Weight	500 g
Material	Aluminium and UV-stabilised plastic
Protection type	IP65
Permissible ambient temperature	-25 °C...+40 °C
Colour	white, similar to RAL 9016
Glow wire test in accordance with IEC 60695-2-10	650 °C
ELECTRICAL VERSION	
Protection class	I

Nominal voltage	220 - 240 V / 50 - 60 Hz
LIGHT	
Diffusor	transparent
Light emission	direct
Beam angle	120 °
Unified Glare Rating	< 30
Flicker factor	<30%
Rated output	10 W
Luminous Flux (light)	1000 lm
Luminous efficacy	100 lm/W
Colour temperature	4000 K
Colour rendering index Ra	> 80
Color Quality Scale	>80
L70B10 lifetime at 25 °C	55000 h
Life time L70B50 at 25 °C	55000 h
Life time L80B10 at 25 °C	40000 h
Life time L80B50 at 25 °C	40000 h
Life time L90B10 at 25 °C	25000 h
Life time L90B50 at 25 °C	25000 h
Photobiological safety	RG0
Energy efficiency class	A++ to A
SENSORS	
Detection angle	120° horizontally and vertically rotatable +/- 180°
Detection range diagonally	8 m
Detection range head-on	3 m
Field of detection	76 m <sup>2</sup>

# DATA SHEET

## BASIC AFL TR 1000 840 MD WH


Item number	GTIN
EL10810923	4015120810923

Range adjustment	Mechanical	Max. mounting height	3 m
Recommended installation height	2,5 m	Light measurement	Daylight


### Accessories

Product designation	Item number	GTIN
FL WALL ARM 700 WH	EL10810527	4015120810527
FL GROUND SPIKE WH	EL10810541	4015120810541

### Scale drawing

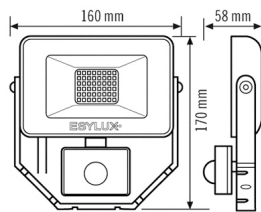

### Field of detections



### Detection range

Diagonally (A)	8 m
Frontal (B)	3 m

### Light distribution

