
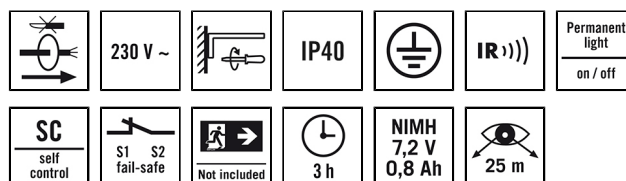


# DATA SHEET

## SLC EL LED 3h 25m IR SC/C WBM

**Item number** EN10030338  
**GTIN** 4015120030338

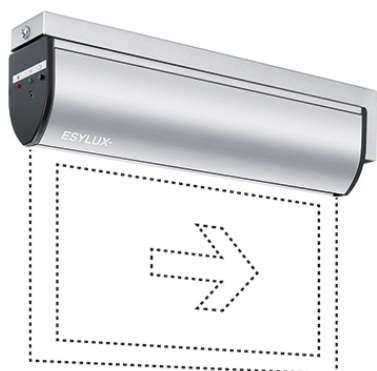

### Product description

- Single battery emergency light with 3 hour emergency light duration and 25 m (DIN) viewing distance for wall bracket mounting with self-control feature (SC) and fail-safe contact (opens if power fails)
- Additional remote control connection (F+, F-) for disabling emergency lighting when building is not in use
- Function test and self-control feature can be enabled using conventional test key or conveniently using the Mobil-SLi remote control
- The single-battery emergency light includes a continuous and a stand-by mode

### Technical data

#### GENERAL

|                     |                   |
|---------------------|-------------------|
| Device category     | Escape sign light |
| User interface      | IR remote control |
| Remote controllable | ✓                 |
| Conformity          | CE, RoHS, WEEE    |
| Warranty            | 5 years           |

#### ATTACHMENT

|                       |              |
|-----------------------|--------------|
| Installation type     | Wall bracket |
| Installation position | Wall         |

#### HOUSING

|                                 |   |
|---------------------------------|---|
| Dimensions                      | Length 315 mm x Width 55 mm x Height/Depth 235 mm |
| Weight                          | 695 g   |
| Material                        | Aluminium   |
| Protection type                 | IP40  |
| Permissible ambient temperature | 5 °C...+35 °C                                     |
| Colour                          | aluminium appearance                              |

#### ELECTRICAL VERSION

|                  |                |
|------------------|----------------|
| Protection class | I              |
| Nominal voltage  | 230 V / 50 Hz  |
| In-rush current  | 5,5 A / 394 µs |
| Leakage current  | 0,02 mA        |

#### LIGHT

|                         |          |
|-------------------------|----------|
| Light emission          | direct   |
| Rated output            | 3 W      |
| Energy efficiency class | A++ to A |

#### EMERGENCY LIGHTING

|                           |                                |
|---------------------------|--------------------------------|
| Viewing distance (DIN EN) | 25 m                           |
| Symbol height             | 125 mm                         |
| Light duration            | 3 h                            |
| Power supply system       | Decentralised (single-battery) |
| Battery status indicator  | by LED                         |
| Automatic testing         | ✓                              |


## SLC EL LED 3h 25m IR SC/C WBM

| Item number | GTIN          |
|-------------|---------------|
| EN10030338  | 4015120030338 |


### Accessories

| Product designation               | Item number | GTIN          |
|-----------------------------------|-------------|---------------|
| SL REMOTE CONTROL                 | EN10017704  | 4015120017704 |
| SLC SYMBOL 2-SIDE DOWN            | EN10030437  | 4015120030437 |
| SLC SYMBOL 2-SIDE RIGHT LEFT      | EN10030444  | 4015120030444 |
| SLC SYMBOL 2-SIDE TOP RIGHT LEFT  | EN10032615  | 4015120032615 |
| SLC SYMBOL 2-SIDE DOWN RIGHT LEFT | EN10032608  | 4015120032608 |
| SLC SYMBOL 2-SIDE TOP             | EN10032622  | 4015120032622 |
| ESY-Pen                           | EP10425356  | 4015120425356 |
| SLC/SLD BATTERY NiMH 800mAh       | EN10030956  | 4015120030956 |

### Scale drawing



### Circuit diagram

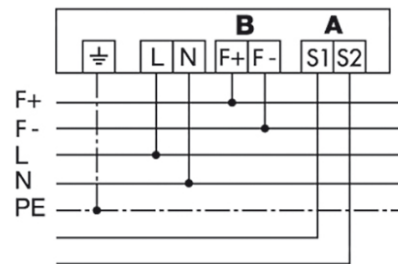

(A) Fail-safe contact.  
Series connection with other emergency lights.  
(B) Remote shutdown.