


SLX EL LED FLAT COVER CPS 14m SM

Item number EN10077005
GTIN 4015120077005

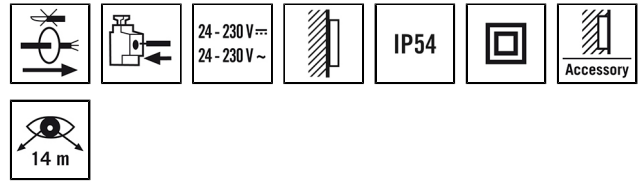

Product description

- Escape route signage for connecting to central, uninterruptible power supply/power supply systems
- Viewing distance of 14m in accordance with DIN EN 1838
- Self control of the light with coloured status indicator
- Plug-in terminal with through-wiring function
- Optimised for wall mounting. Other mounting options with a wide range of accessories (not included)
- UV-stabilised polycarbonate housing
- Pictogram (stick-on) not included. Please order as an accessory

Technical data

GENERAL

Device category	Escape sign light
Remote controllable	–
Conformity	CE, RoHS, WEEE
Warranty	5 years

ATTACHMENT

Installation type	Surface mounting
Installation position	Wall
Installation dimension	Installation length: 370 mm x Installation width: 115 mm x Installation depth: 66 mm
Type of connection	Push terminal
Connectable wire cross section	1,50 - 2,50 mm ²

HOUSING

Dimensions	Length 328 mm x Width 108 mm x Height/Depth 46 mm
Weight	442 g
Material	UV-stabilised polycarbonate
Protection type	IP54

Permissible ambient temperature	5 °C...+35 °C
Colour	white, similar to RAL 9016

ELECTRICAL VERSION

Protection class	II
Nominal voltage	24 - 230 V
In-rush current	19,5 A / 205 µs
Leakage current	0,009 mA

LIGHT

Light emission	direct
Rated output	3 W
Energy efficiency class	A++ to A

EMERGENCY LIGHTING

Viewing distance (DIN EN)	14 m
Symbol height	70 mm
Power supply system	Central (common battery)
Automatic testing	–

SLX EL LED FLAT COVER CPS 14m SM

Item number	GTIN
EN10077005	4015120077005

Accessories

Product designation	Item number	GTIN
SLX 14 FLAT SYMBOL SET I	EN10077128	4015120077128
SLX 14 FLAT SYMBOL SET II	EN10077135	4015120077135
SLX MOUNTING FRAME 370 FM	EN10077104	4015120077104
SLX/ELX BASKET GUARD WALL	EN10077265	4015120077265
ESY-Pen	EP10425356	4015120425356

Scale drawing

