


SLX EL LED FLAT COVER CPS 24m SM

Item number EN10077036
GTIN 4015120077036

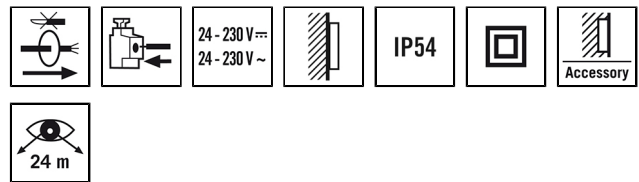

Product description

- Escape route signage for connecting to central, uninterruptible power supply/power supply systems
- Viewing distance of 24m in accordance with DIN EN 1838
- Self control of the light with coloured status indicator
- Plug-in terminal with through-wiring function
- Optimised for wall mounting. Other mounting options with a wide range of accessories (not included)
- UV-stabilised polycarbonate housing
- Pictogram (stick-on) not included. Please order as an accessory

Technical data

GENERAL	
Device category	Escape sign light
Remote controllable	–
Conformity	CE, RoHS, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Surface mounting
Installation position	Wall
Installation dimension	Installation length: 430 mm x Installation width: 155 mm x Installation depth: 66 mm
Type of connection	Push terminal
Connectable wire cross section	1,50 - 2,50 mm ²
HOUSING	
Dimensions	Length 388 mm x Width 148 mm x Height/Depth 46 mm
Weight	655 g
Material	UV-stabilised polycarbonate

Protection type	IP54
Permissible ambient temperature	5 °C...+35 °C
Colour	white, similar to RAL 9016

ELECTRICAL VERSION

Protection class	II
Nominal voltage	24 - 230 V

LIGHT

Light emission	direct
Rated output	3 W
Energy efficiency class	A++ to A

EMERGENCY LIGHTING

Viewing distance (DIN EN)	24 m
Symbol height	120 mm
Power supply system	Central (common battery)
Automatic testing	–

SLX EL LED FLAT COVER CPS 24m SM

Item number	GTIN
EN10077036	4015120077036

Accessories

Product designation	Item number	GTIN
SLX 24 FLAT SYMBOL SET I	EN10077500	4015120077500
SLX 24 FLAT SYMBOL SET II	EN10077517	4015120077517
SLX/ELX MOUNTING FRAME 430 FM	EN10077234	4015120077234
SLX/ELX BASKET GUARD WALL	EN10077265	4015120077265
SL REMOTE CONTROL	EN10017704	4015120017704
ESY-Pen	EP10425356	4015120425356

Scale drawing

