
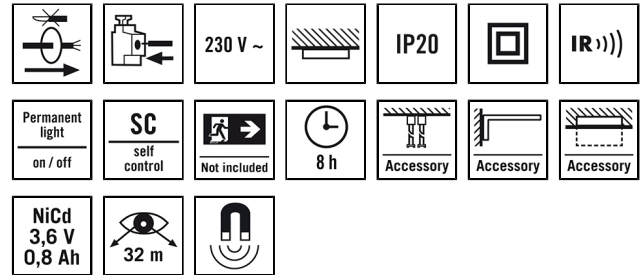


SLX EL LED DISPLAY 8h 32m IR SM

Item number EN10077319
GTIN 4015120077319

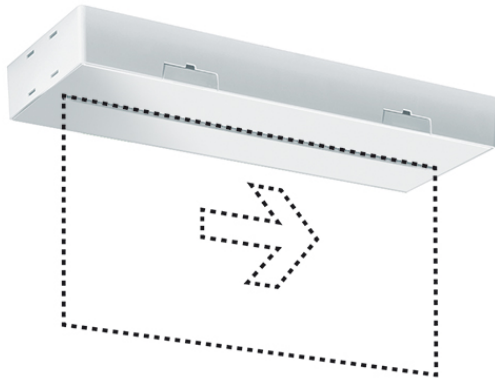

Product description

- Single-battery emergency light for escape route signage with 8 h emergency light duration for 32m viewing distance
- Self-monitoring with coloured status indicator
- Tamper-resistant function check can be executed by remote control or magnet
- Optionally, operation in continuous or stand-by mode possible

Technical data

| GENERAL | |
|--------------------------------|--|
| Device category | Escape sign light |
| User interface | IR remote control |
| Remote controllable | ✓ |
| Conformity | CE, RoHS, WEEE |
| Warranty | 5 years |
| ATTACHMENT | |
| Installation type | Surface mounting |
| Installation position | Ceiling / wall |
| Installation dimension | Installation length: 430 mm x Installation width: 155 mm x Installation depth: 66 mm |
| Type of connection | Push terminal |
| Connectable wire cross section | 1,50 - 2,50 mm ² |
| HOUSING | |
| Dimensions | Length 388 mm x Width 148 mm x Height/Depth 223 mm |
| Weight | 770 g |
| Material | UV-stabilised polycarbonate |
| Protection type | IP20 |

| | |
|---------------------------------|----------------------------|
| Permissible ambient temperature | 5 °C...+35 °C |
| Colour | white, similar to RAL 9016 |

| ELECTRICAL VERSION | |
|--------------------|-----------------|
| Protection class | II |
| Nominal voltage | 230 V / 50 Hz |
| In-rush current | 17,5 A / 208 µs |
| Leakage current | 0,009 mA |

| LIGHT | |
|-------------------------|----------|
| Light emission | direct |
| Rated output | 3 W |
| Energy efficiency class | A++ to A |

| EMERGENCY LIGHTING | |
|---------------------------|--------------------------------|
| Viewing distance (DIN EN) | 32 m |
| Symbol height | 160 mm |
| Light duration | 8 h |
| Power supply system | Decentralised (single-battery) |
| Battery status indicator | by LED |
| Automatic testing | – |


SLX EL LED DISPLAY 8h 32m IR SM

| Item number | GTIN |
|-------------|---------------|
| EN10077319 | 4015120077319 |

Accessories

| Product designation | Item number | GTIN |
|--|-------------|---------------|
| SLX BATTERY NiCd 800mAh | EN10077401 | 4015120077401 |
| SLX 32 DISPLAY SYMBOL 1-SIDE RIGHT | EN10079009 | 4015120079009 |
| SLX 32 DISPLAY SYMBOL 1-SIDE LEFT | EN10079016 | 4015120079016 |
| SLX 32 DISPLAY SYMBOL 1-SIDE DOWN | EN10079023 | 4015120079023 |
| SLX 32 DISPLAY SYMBOL 2-SIDE DOWN | EN10079030 | 4015120079030 |
| SLX 32 DISPLAY SYMBOL 2-SIDE RIGHT LEFT | EN10079047 | 4015120079047 |
| SLX 32 DISPLAY SYMBOL 1-SIDE TOP | EN10032509 | 4015120032509 |
| SLX 32 DISPLAY SYMBOL 2-SIDE TOP | EN10032516 | 4015120032516 |
| SLX 32 DISPLAY SYMBOL 2-SIDE TOP RIGHT LEFT | EN10032523 | 4015120032523 |
| SLX 32 DISPLAY SYMBOL 2-SIDE DOWN RIGHT LEFT | EN10032530 | 4015120032530 |
| SLX/ELX WALL BRACKET 110 | EN10077289 | 4015120077289 |
| SLX/ELX MOUNTING FRAME 430 FM | EN10077234 | 4015120077234 |
| SLX/ELX TUBE PENDULUM SET | EN10078316 | 4015120078316 |
| SLX/ELX PENDULUM SET | EN10077258 | 4015120077258 |
| SLX/ELX WALL ARM 370 | EN10078309 | 4015120078309 |
| SLX/ELX BASKET GUARD CEILING | EN10077296 | 4015120077296 |
| SL REMOTE CONTROL | EN10017704 | 4015120017704 |
| ESY-Pen | EP10425356 | 4015120425356 |

Scale drawing

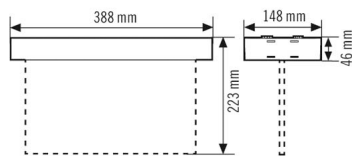

Circuit diagram

