

## ELSA-2 DL 225 OP 110° 1800 830 DALI WH

**Item number** E010298943  
**GTIN** 4015120298943

110 V - 230 V ~	IP20 IP44	CQS 80 - 85	CRI 80	LED 3000 K
--------------------	--------------	----------------	-----------	---------------

### Product description

- LED downlight, 3000K with opal cover (diffuser), 18W, for ceiling mounting without additional accessories
- High light quality and system performance
- Operating device DALI with SwitchDIM, included



### Technical data

#### GENERAL

Device category	Downlight
User interface	DALI-Bus
Remote controllable	–
Conformity	CE, RoHS, SundaHus
Warranty	5 years

#### ATTACHMENT

Installation type	Recessed mounting
Installation position	Ceiling
Installation dimension	Installation depth: 50 mm, Ø 225 mm
Type of connection	Open end
Connectable wire cross section	0,75 - 2,50 mm <sup>2</sup>
Number of contacts	3
Length of cable	0,18 m

#### HOUSING

Dimensions	Height/Depth 25 mm, Ø 240 mm
Weight	1000 g
Material	powder-coated aluminium
Protection type	IP20 / IP44 below the ceiling (built-in)
Permissible ambient temperature	-20 °C...+40 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9003
Glow wire test in accordance with IEC 60695-2-10	650 °C

#### ELECTRICAL VERSION

Protection class	II
Nominal voltage	220 - 240 V / 50 - 60 Hz
In-rush current	9,1 A / 98 µs
Leakage current	0,009 mA

#### LIGHT

Diffusor	opal
Light emission	direct
Beam angle	110 °
Unified Glare Rating	≤ 25
Flicker factor	0 %
Rated output	17,5 W
Luminous Flux (light)	1750 lm
Luminous efficacy	100 lm/W
Colour temperature	3000 K
Colour rendering index Ra	> 80
Colour tolerance	SDCM < 3
Color Quality Scale	>80
L70B10 lifetime at 25 °C	60000 h
Life time L70B50 at 25 °C	60000 h
Life time L80B10 at 25 °C	40000 h
Life time L80B50 at 25 °C	40000 h
Life time L90B10 at 25 °C	20000 h
Life time L90B50 at 25 °C	20000 h
Photobiological safety	RG0
Energy efficiency class	A++ to A


## ELSA-2 DL 225 OP 110° 1800 830 DALI WH

**Item number**      **GTIN**  
 E010298943      4015120298943


### Accessories

Product designation	Item number	GTIN
CABLE EXTENSION 1m	E010300295	4015120300295
ELSA-2 MOUNTING FRAME 225 SM WH	E010300899	4015120300899
ELSA-2 RING 225	E010300264	4015120300264
JUNCTION BOX 5-POLE BK	E010430947	4015120430947


### Scale drawing

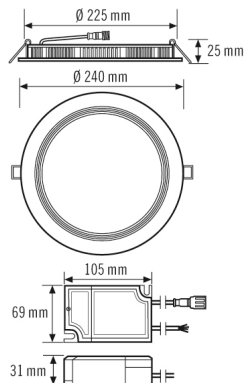

### Light distribution

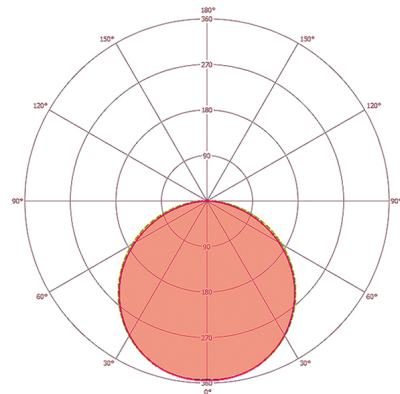


### Circuit diagram

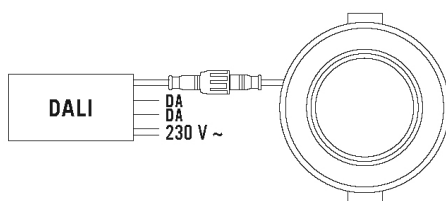

Standard operation

### Circuit diagram

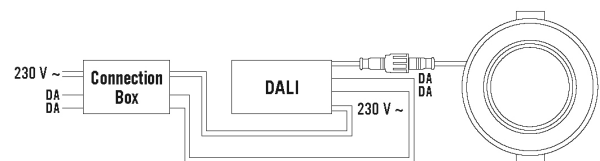

Standard operation CB


# DATA SHEET

## ELSA-2 DL 225 OP 110° 1800 830 DALI WH

**Item number**      **GTIN**  
E010298943      4015120298943

### Circuit diagram

---

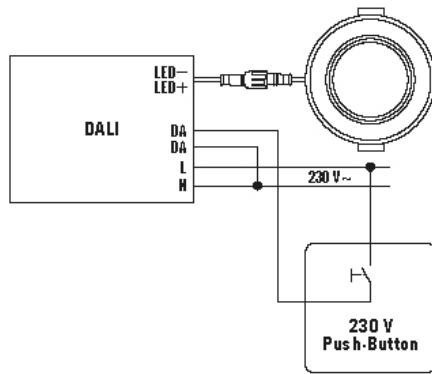

*Standard operation SwitchDIM*