


PD-C 360i/8 DUO DALI WAGO WINSTA CodeI

Item number **GTIN**
 EP10424847 4015120424847

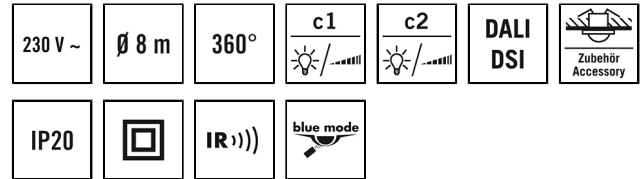

Product description

- Presence detector with 360° field of detection for ceiling mounting
- Range of up to 8 m in the diameter at a recommended installation height of 3 m
- Automatic light control by DALI or DSI electronic ballasts to a constant brightness level depending on presence and natural light (with DALI/DSI output)

Technical data

GENERAL	
Device category	Ceiling-mounted presence detector
Special product features	Simple programming using remote control with "blue mode" technology
User interface	IR remote control
Remote controllable	✓
Conformity	CE, RoHS, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Recessed ceiling mounting
Installation position	Ceiling
Installation dimension	Installation depth: 300 mm, Ø 68 mm
Type of connection	Plug
Connector	WAGO WINSTA® MIDI Cod. I
Number of contacts	5
Length of cable	2 m
HOUSING	
Dimensions	Height/Depth 99 mm, Ø 108 mm
Weight	675 g
Material	UV-stabilised polycarbonate
Protection type	IP20
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9010
ELECTRICAL VERSION	
Protection class	II

Nominal voltage	230 V / 50 Hz
Power consumption	0,6 W

SENSORS	
Detection angle	360°
Detection range diagonally	Ø 8 m
Detection range head-on	Ø 6 m
Detection range presence	Ø 4 m
Field of detection	up to 50 m ²
Recommended installation height	3 m
Max. mounting height	5 m
Light measurement	mixed light

CONTROL	
Number of light channels	2
Push button input lighting	2
Push button input HVAC	-
Slave input	✓
Max. number of slave detectors	10
Mode	Semi-automatic, Fully automatic
Konstantlichtregelung	✓
Channel 1	Lighting
Interface	Switching/Dimming
Contact	Bus system
Push button input channel 1	✓
Switch-off delay channel 1	60 s...240 min
Orientation light	10 - 50 % luminous efficiency
Switch-off delay time, orientation light	approx. 1 min.-240 min.
Channel 2	Lighting

PD-C 360i/8 DUO DALI WAGO WINSTA CodeI

Item number	GTIN
EP10424847	4015120424847


Output	DALI
Push button input channel 2	✓
Switch-off delay channel 2	60 s...240 min
Orientation light	10 - 50 % luminous efficiency
Switch-off delay time, orientation light	approx. 1 min.-240 min.
Function	Switching

Master/slave function	✓
Presence simulation	–
Manual override	yes
DALI output 1	2-pin DALI/DSi control cable/broadcast
DALI/DSi output 2	2-pin DALI/DSi control cable/broadcast
No. of DALI electronic ballasts	max. 25 devices per DALI/DSi output


Accessories

Product designation	Item number	GTIN
PD-C 360/8 Slave	EP10055379	4015120055379
PD-C 360/24 Slave	EP10055386	4015120055386
PD-C 360/32 Slave	EP10427770	4015120427770
ESY-Pen	EP10425356	4015120425356
REMOTE CONTROL PDi DALI	EP10425899	4015120425899
REMOTE CONTROL PDi/USER	EM10425547	4015120425547
COMPACT COVER SET 8 SR	EP10425936	4015120425936
COMPACT COVER SET 8 BK	EP00007521	4015120007521
BASKET GUARD ROUND LARGE	EM10425608	4015120425608
BASKET GUARD ROUND SMALL	EM10425615	4015120425615
ACTUATOR FULL AUTO C3 DALI	EP10427473	4015120427473
ACTUATOR SEMI AUTO C4 DALI	EP10427480	4015120427480

Scale drawing

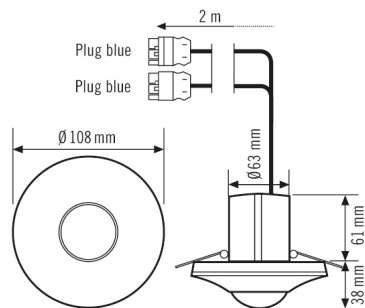

Field of detections



Detection range

■ Diagonally (A)	∅ 8 m
■ Frontal (B)	∅ 6 m
■ Presence area (C)	∅ 4 m