



## PD-C 180i/16 UC

**Item number** EP10427305  
**GTIN** 4015120427305

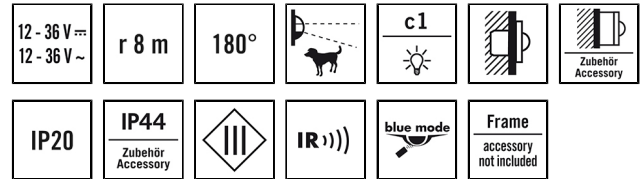

### Product description

- Presence detector with 180° field of detection for wall mounting
- range of up to 16 m in diameter for the use in connection with building management systems
- Operating voltage 12-36 V DC or AC voltage (AC/DC)
- Potential-free software-controlled switching output (C/O)
- Connectable and disconnectable display of detection
- Silent switch up to the maximum of 2 A

### Technical data

GENERAL	
Device category	Wall-mounted presence detector
Special product features	Simple programming using remote control with "blue mode" technology
User interface	IR remote control
Remote controllable	✓
Conformity	CE, RoHS, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Recessed mounting
Installation position	Wall
Installation dimension	Installation depth: 34 mm, Ø 60 mm
Type of connection	Push terminal
Connectable wire cross section	1,50 - 2,50 mm <sup>2</sup>
HOUSING	
Dimensions	Length 70 mm x Width 70 mm x Height/Depth 55 mm
Weight	63 g
Material	UV-stabilised polycarbonate
Protection type	IP20, IP44 depending on cover (order separately)
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing
Colour	Opal matt
ELECTRICAL VERSION	
Protection class	III

Nominal voltage	12 - 36 V
Power consumption	0,3 W
SENSORS	
Detection angle	180° horizontal, 60° vertical
Detection range diagonally	Ø 16 m
Detection range head-on	Ø 12 m
Detection range presence	Ø 8 m
Field of detection	up to 101 m <sup>2</sup>
Recommended installation height	1,1 m
Max. mounting height	2,2 m
Light measurement	mixed light
CONTROL	
Number of light channels	1
Push button input lighting	1
Push button input HVAC	—
Slave input	—
Mode	Semi-automatic, Fully automatic
Konstantlichtregelung	✓
Channel 1	Lighting
Interface	Switching/Dimming
Contact	make contact/floating
Switching capacity channel 1	12 - 36 V UC (AC/DC), 2 A
Push button input channel 1	✓
Switch-off delay channel 1	60 s...60 min
Master/slave function	✓
Manual override	yes


## PD-C 180i/16 UC

Item number	GTIN
EP10427305	4015120427305


### Accessories

Product designation	Item number	GTIN
ESY-Pen	EP10425356	4015120425356
COVER IP20 WH	EM10055102	4015120055102
COVER IP20 SWH	EM10055119	4015120055119
COVER IP20 CWH	EM10055126	4015120055126
COVER IP20 AN	EM10055133	4015120055133
COVER IP20 SR	EM10055140	4015120055140
COVER ELK RS/PLUS IP20 WH	EM10055270	4015120055270
COVER SEL Trend IP20 WH	EM10055287	4015120055287
COVER SEL EXX IP20 WH	EM10055294	4015120055294
COVER IP44 WH	EM10055157	4015120055157
COVER BER S1 IP20 PWH	EP10427107	4015120427107
COVER BER S1 IP20 WH	EP10427114	4015120427114
COVER BER MOD2 IP20 PWH	EP10427121	4015120427121
COVER BUJ REF IP20 WH	EP10427145	4015120427145
COVER GIR S55 IP20 WH	EP10427169	4015120427169
COVER GIR S55 IP20 CWH	EP10427176	4015120427176
MOUNTING BOX IP44 SM WH	EM10055164	4015120055164
REMOTE CONTROL MDi/PDi	EM10425509	4015120425509

### Scale drawing



### Field of detections



### Detection range

Diagonally (A)	Ø 16 m
Frontal (B)	Ø 12 m
Presence area (C)	Ø 8 m

# DATA SHEET

## PD-C 180i/16 UC

**Item number**      **GTIN**  
EP10427305      4015120427305

### Circuit diagram

---

