


PD-C 360i/8 UC

Item number **GTIN**
 EP10427312 4015120427312

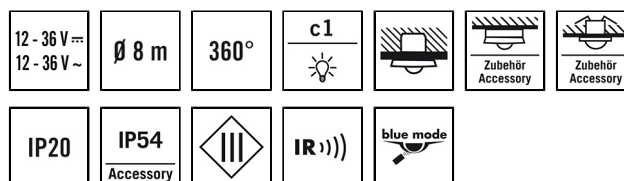

Product description

- Presence detector with 360° field of detection for ceiling mounting
- range of up to 8 m in diameter for the use in connection with building management systems
- Operating voltage 12-36 V DC or AC voltage (AC/DC)
- Potential-free software-controlled switching output (C/O)
- Connectable and disconnectable display of detection
- Silent switch up to the maximum of 2 A

Technical data

GENERAL	
Device category	Ceiling-mounted presence detector
Special product features	Simple programming using remote control with "blue mode" technology
User interface	IR remote control
Remote controllable	✓
Conformity	CE, RoHS, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Recessed mounting
Installation position	Ceiling
Installation dimension	Installation depth: 24 mm, Ø 60 mm
Type of connection	Push terminal
Connectable wire cross section	1,50 - 2,50 mm ²
HOUSING	
Dimensions	Height/Depth 62 mm, Ø 108 mm
Weight	127 g
Material	UV-stabilised polycarbonate
Protection type	recessed-mounted IP20, IP20/IP54 with surface-mounted box (order separately), IP20 as recessed ceiling-mounted version (order installation set separately)
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9010
ELECTRICAL VERSION	

Protection class	III
Nominal voltage	12 - 36 V
Power consumption	0,3 W
SENSORS	
Detection angle	360°
Detection range diagonally	Ø 8 m
Detection range head-on	Ø 6 m
Detection range presence	Ø 4 m
Field of detection	up to 50 m ²
Recommended installation height	3 m
Max. mounting height	5 m
Light measurement	mixed light
CONTROL	
Number of light channels	1
Push button input lighting	1
Push button input HVAC	–
Slave input	–
Mode	Semi-automatic, Fully automatic
Konstantlichtregelung	✓
Channel 1	Lighting
Interface	Switching/Dimming
Contact	make contact/floating
Switching capacity channel 1	12 - 36 V UC (AC/DC), 2 A
Push button input channel 1	✓
Switch-off delay channel 1	60 s...60 min
Master/slave function	✓
Manual override	yes


PD-C 360i/8 UC

Item number	GTIN
EP10427312	4015120427312


Accessories

Product designation	Item number	GTIN
ESY-Pen	EP10425356	4015120425356
REMOTE CONTROL MDi/PDi	EM10425509	4015120425509
COMPACT MOUNTING BOX IP20 SM WH	EP10425370	4015120425370
COMPACT MOUNTING BOX IP20 SM SR	EP10425387	4015120425387
COMPACT MOUNTING BOX IP54 SM WH	EP10425905	4015120425905
COMPACT MOUNTING BOX IP54 SM SR	EP10425912	4015120425912
COMPACT COVER SET 8 SR	EP10425936	4015120425936
MOUNTING SET IP20 FM 62 WH	EP10425929	4015120425929
BASKET GUARD ROUND LARGE	EM10425608	4015120425608
BASKET GUARD ROUND SMALL	EM10425615	4015120425615
COMPACT MOUNTING BOX IP54 SM BK	EP10426940	4015120426940
COMPACT MOUNTING BOX IP20 SM BK	EP10426933	4015120426933
COMPACT COVER SET 8 BK	EP00007521	4015120007521

Scale drawing




Field of detections



Detection range

Diagonally (A)	Ø 8 m
Frontal (B)	Ø 6 m
Presence area (C)	Ø 4 m

Circuit diagram

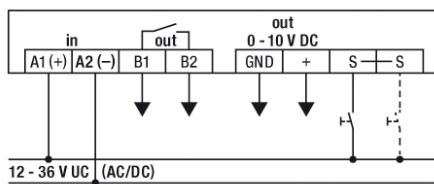

Standard operation