

DATA SHEET

ESYLUX


PROTECTOR K 9 V

Item number

ER10018909

GTIN

4015120018909



Product description

- Photoelectric smoke detector for battery operation with in-built relay driver for the PROTECTOR K switching relay
- Safety through automatic self-test with fault display
- Extra safety through genuine electronic smoke chamber testing at the push of a button

Technical data

GENERAL

Device category	Smoke alarm
Remote controllable	—
Conformity	CE, RoHS, WEEE
Warranty	3-year
Automatic testing	approx. every 45 seconds with fault display
Electronic smoke chamber test	at the push of a button
Signal volume	approx. 85 dB/3 m
Networkability	up to 30 detectors by wire

ATTACHMENT

Installation type	Surface mounting
-------------------	------------------

Installation position

Ceiling

HOUSING

Dimensions	Height/Depth 48 mm, Ø 106 mm
Weight	199 g
Protection type	IP20
Permissible ambient temperature	0 °C...+55 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9010

ELECTRICAL VERSION

Protection class	III
Nominal voltage	9 V


Accessories

Product designation	Item number	GTIN
PROTECTOR K MOUNTING BOX 20 SM WH	ER10018992	4015120018992
PROTECTOR K MOUNTING BOX 27 SM WH	ER10018985	4015120018985
BASKET GUARD ROUND LARGE	EM10425608	4015120425608
BASKET GUARD ROUND SMALL	EM10425615	4015120425615
PROTECTOR K RELAY	ER10018923	4015120018923


PROTECTOR K 9 V

Item number	GTIN
ER10018909	4015120018909

Scale drawing



Circuit diagram

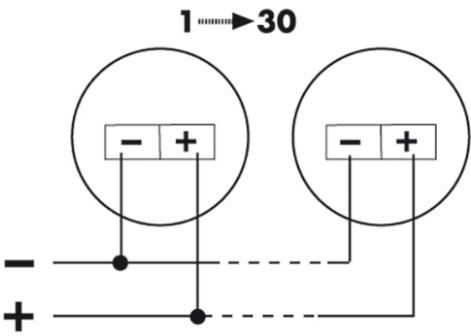

9 V battery operation
Note: Interconnection with max. 30 detectors, max. line length 300 m.