



## Arteor™ Signalling devices

Cat. No(s): 5 722 24/25 - 5 727 22/23/24/25



5 722 22/25 - 5 727 22/24



5 722 23/25


### 1. USE

Signalling devices using different coloured LED lighting.

### 2. RANGE

Description	White	Magnesium
Two-colour green/red signalling device Square	5 722 24	5 727 24
Blue signalling device Square	5 722 25	5 727 22
Two-colour green/red signalling device Round	-	5 727 25
Blue signalling device Round	-	5 727 23

### 3. OVERALL DIMENSIONS (mm)

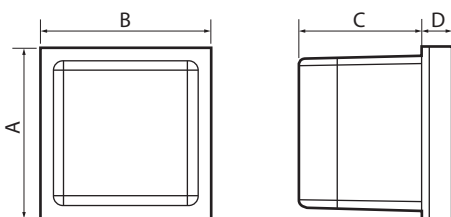

A	B	C	D
45	45	33	8.5


### 4. CONNECTION

Screw terminals

Terminal capacity: 1 x 2.5 mm<sup>2</sup> or 2 x 1.5 mm<sup>2</sup>

Stripping length: 8 mm

Type of screwdriver: flat-blade 3 mm  
 or Philips No 1  
 or posidrive No 1  
 or mixed size 0

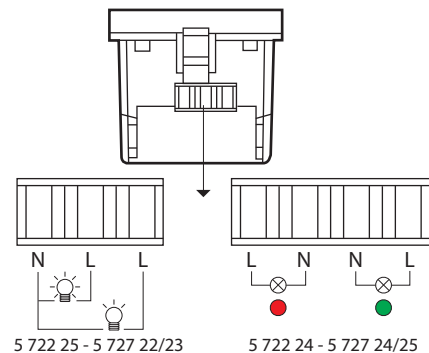

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Impact tests: IK 04

Penetration by solid bodies/liquid: IP 40 (mounted)  
 IP 20 (alone)

#### ■ 5.2 Material characteristics

Base: Polycarbonate

Cover plate: ABS

Indicator light: Polycarbonate

Self-extinguishing:

- + 750° C / 30 s for insulating parts holding live parts in place.
- + 650° C / 30 s for other parts made of insulating materials.

#### ■ 5.3 Electrical characteristics

Voltage: 230 V

Frequency: 50/60 Hz

Power: - 5 722 24 - 5 727 24/25: 2 x 1 W

- 5 722 25 - 5 727 22/23: 0.2 W or 1 W

#### ■ 5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C

Operating temperature: - 5° C to + 50° C

## 5. CLEANING

Surface cleaning with a cloth

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following cleaning agents: hexane (EN-60669-1), methylated spirits, soapy water, diluted ammonia, diluted pure bleach 10%, glass cleaning substance, pre-impregnated wipes.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.