



Arteor™ 10 AX switches


Cat. No(s): 572 004/005/034/035 - 572 504/505/534/535
573 010/011/012/013/014/015/060/061
573 110/111/112/113/114/115/160/161



572 004/504



572 034/035/534/535















573 060/061/160/161

1. USE

General lighting control mechanisms.

2. RANGE


	Designation	Finishes.		No. of modules	Connection method	Weight (g)	Characteristics
		White	Magnesium				
	One-way switch (square)	572 004	572 504	1	with screws	21	10 AX - 250 VAC
	Two-way switch (square)	572 005	572 505	1	with screws	24	10 AX - 250 VAC
	One-way switch (square)	572 034	572 534	2	with screws	29.1	10 AX - 250 VAC
	Two-way switch (square)	572 035	572 535	2	with screws	31.9	10 AX - 250 VAC
	One-way switch (round left)	573 010	573 110	1	with screws	20.3	10 AX - 250 VAC
	One-way switch (middle)	573 011	573 111	1	with screws	20.9	10 AX - 250 VAC
	One-way switch (round right)	573 012	573 112	1	with screws	20.3	10 AX - 250 VAC
	Two-way switch (round left)	573 013	573 113	1	with screws	23.1	10 AX - 250 VAC
	Two-way switch (middle)	573 014	573 114	1	with screws	23.7	10 AX - 250 VAC
	Two-way switch (round right)	573 015	573 115	1	with screws	23.1	10 AX - 250 VAC
	One-way switch (round)	573 060	573 160	2	with screws	27.7	10 AX - 250 VAC
	Two-way switch (round)	573 061	573 161	2	with screws	30.5	10 AX - 250 VAC

Arteor™ 10 AX switches


Cat. No(s): 572 004/005/034/035 - 572 504/505/534/535
573 010/011/012/013/014/015/060/061
573 110/111/112/113/114/115/160/161

3. PREPARATION

The mechanisms can be flush-mounted or surface-mounted.

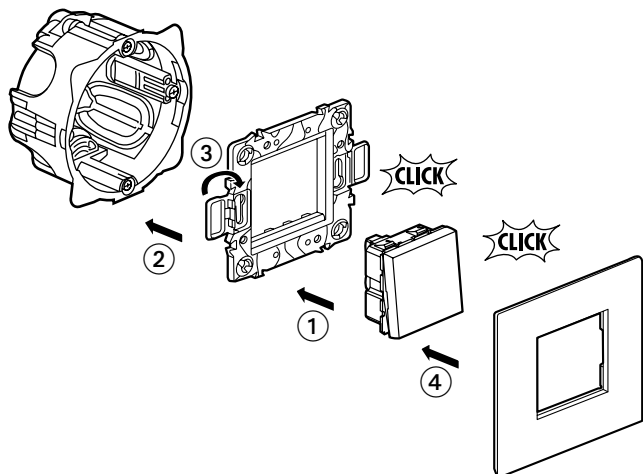


4. OVERALL DIMENSIONS

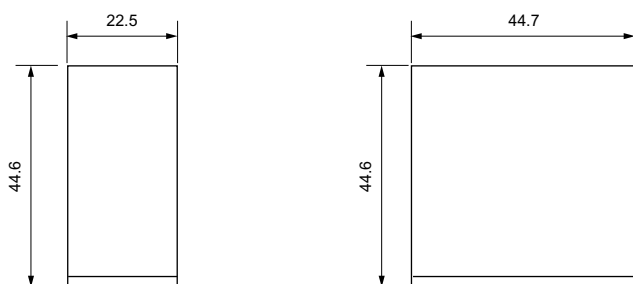

572 004/005/504/505
573 010/011/012/013/014/015
573 110/111/112/113/114/115

572 034/035/534/535
573 060/061/160/161



5. CONNECTION

Terminals: with screws
Capacity: 2 x 2.5 mm² or 1 x 4 mm²
Stripping: 10 mm
Screwdriver: 4 mm flat-blade up to 5.5 mm

6. OPERATION

Push button mechanism.

7. TECHNICAL CHARACTERISTICS

7.1 Mechanical characteristics

Impact tests: IK 04
Protection by solid bodies/liquids: IP 40 (mounted)
IP 20 (alone)

7.2 Material characteristics

Rocker: Polycarbonate
Base: Polycarbonate
Basket: Polypropylene

7.3 Electrical characteristics

Voltage: 250 VAC
Current: 10 AX
Self-extinguishing: 650° C / 30 s

7.4 Climatic characteristics

Storage temperatures: - 10° C to + 70° C
Operating temperatures: - 5° C to + 50° C

8. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following cleaning agents: Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

9. CONFORMITY - APPROVALS

Approvals in process : - IECEE
- SABS
- PAI
- PSB (except 572 034/534 and 573 060/160)
- SONCAP
- KEN