



Epure style

Illuminated switches


Cat. No(s): 67491/92/93 - 67591/92/93
67691/92/93 - 67791/92/93



67491 - 67591
67691 - 67791



67492 - 67592
67692 - 67792

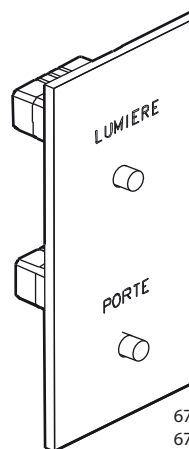

67493 - 67593
67693 - 67793

1. USE

2-module flush-mountable local control units with push-buttons.
Fitted with Art faceplate and an indicator for the illuminated and monitor functions.
Mechanisms supplied with site protection covers.

2. RANGE

"Porte" (door) illuminated switch

67491	● Brushed steel
67591	● Satin steel
67691	● Mirror-polished steel
67791	● Mirror-polished gold

"Lumière" (light) illuminated switch

67492	● Brushed steel
67592	● Satin steel
67692	● Mirror-polished steel
67792	● Mirror-polished gold

"Porte" + "Lumière" (door + light) illuminated switch


67493	● Brushed steel
67593	● Satin steel
67693	● Mirror-polished steel
67793	● Mirror-polished gold

Note: Other finishes and configurations are provided, see technical data sheet F02217EN/00.

3. DISMANTLING

The plates can be dismantled by inserting the tip of a screwdriver in a purpose-designed notch on the side of the plate and using it as a lever to unclip it from the fixing points.
Once the plate has been lifted off the wall slightly, just slide your fingers between the plate and the wall to gently remove the plate.
Take care not to pull too hard on the plate, to avoid breaking the fixing clips.

4. DIMENSIONS (mm)

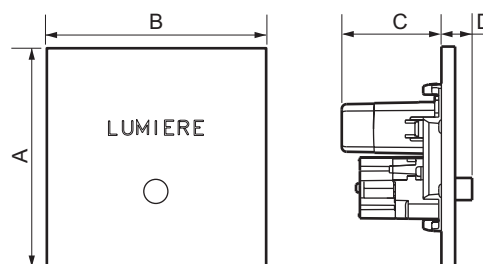

Cat. Nos	A	B	C	D
67491 - 67591 - 67691 - 67791	80	80	35	10.5
67492 - 67592 - 67692 - 67792	80	80	35	10.5
67493 - 67593 - 67693 - 67793	151	80	35	10.5

5. CONNECTION

- Terminal type: screw
- Capacity: 1.5 mm²
- Compatible flexible or rigid cable
- Screwdriver: 4 mm flat

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Impact test: IK 02

Ingress of solids/liquids: IP 21

■ 6.2 Material characteristics

• Decorative brass + varnish:

Cat. Nos 67491 - 67591 - 67492 - 67592 - 67493 - 67593

• Decorative brass:

Cat. Nos 67691 - 67791 - 67692 - 67792 - 67693 - 67793

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place

650° C / 30 s for the other insulating components

■ 6.3 Electrical characteristics

Voltage: 250 V~

Frequency: 50/60 Hz

Indicator: power 1 W - voltage 220 V

■ 6.4 Climate characteristics

Storage temperature: - 10° C to + 70° C

Operating temperature: - 5° C to + 40° C

7. CARE

■ 7.1 Instructions

Use a cloth moistened with methylated spirit, glass cleaner or soapy water. These products contain no harsh chemicals and are non-abrasive.

■ 7.2 Banned products

- Special products for stainless steel, renovator polishes, as these are usually abrasive and contain harsh chemicals

- Products containing bleach or acid (descalers, for example)

- Scouring powders (these contain abrasives)

8. REFERENCE CODES FOR COMPLETE MECHANISMS

Type references	Finish	Characteristics	Terminals	Control
C	Chrome-plated, Gold-plated	2 A - 250 V~	st	PBM

st: screw terminal

PBM: momentary contact push-button

9. STANDARDS AND APPROVALS

NF certified