




1. USE

Connecting device for light features.
 Can be mounted on a BESA box.

2. RANGE

Ceiling Rose	Cat. No
Cover and base	0 601 95

3. DIMENSIONS (mm)

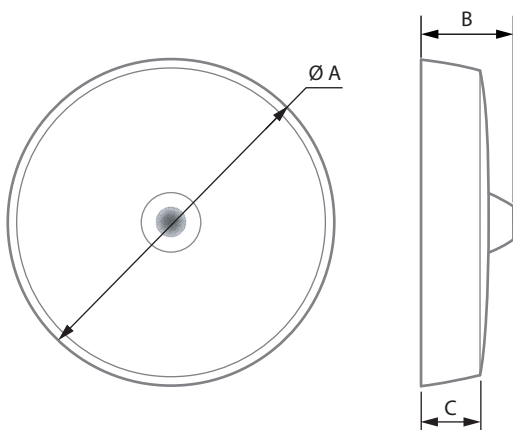

Ø A	B	C
88	30	21

4. CONNECTION

Type of terminals: with screws
 Stripping length: 7 mm
 Phase, neutral, earth and "loop in" terminals will each accept:
 5 x 0.75 mm², 5 x 1 mm², 4 x 1.5 mm², 3 x 2.5 mm² or 2 x 4 mm² conductors
 Tightening torque: 0.6 N
 Rigid or flexible cables admissible

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against mechanical impact: IK 04
 Protection against solid bodies and liquids: IP 20

■ 5.2 Material characteristics

- Cover material: Urea
- Base: PC
- Terminal cover material: PC
- L/N/E terminals: Brass
- Screws: Mild steel, plated

Self extinguishing:

- + 850° C / 30 s for insulating parts holding live parts in place
- + 650° C / 30 s for the other insulating components

■ 5.3 Electrical characteristics

Voltage: 250 V~
 Current: 6 A

■ 5.4 Climatic characteristics

Storage temperature: - 5° C to + 60° C
 Use temperature: - 5° C to + 40° C

6. CLEANING

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichlorethylene.

Caution: A preliminary test should be carried out if specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

BS 67