


Defineo™
Curtain switch 10AX

Cat. No(s): 7 012 08




7 012 08

1. USE


Curtain control switch

Mechanism for flush-mounted installation.
 To be equipped with frame and plate.

2. RANGE

	Description	White
	Curtain switch 10AX 1M white	701208


3. OVERALL DIMENSIONS (mm)

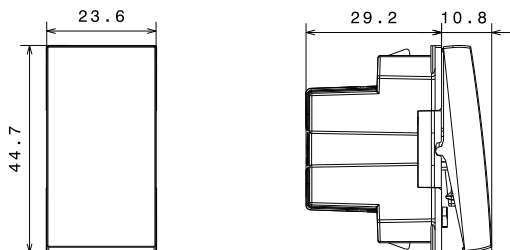

4. CONNECTION

References	Terminals	Capacity	Stripping	Screwdriver
7 012 08	With screws	2 x 2.5 mm ²	7 mm	Flat-blade 4 mm

5. WIRING

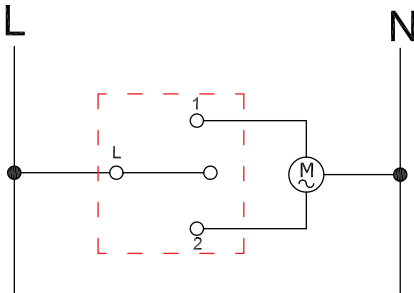

6. TECHNICAL CHARACTERISTICS

6.1 Mechanical characteristics

Impact tests: IK 04

6.2 Material characteristics

- Rocker: PC
 - Base: PC
 - Halogen free
 - UV resistant
- Self-extinguishing:
 + 850°C / 30 s for insulating components holding in place live parts.
 + 650°C / 30 s for the other insulating components.

6.3 Electrical characteristics

Voltage: 250 VAC
 Current: 10 AX expect

6.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C
 Operating temperature: - 5° C to + 35° C

7. CLEANING

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.

7.1 Resistance to cleaning agents

Resistance to the following agents: Hexane (EN 60669-1), methylated spirits, soapy water, diluted ammonia, pure bleach diluted 10%, glass cleaning substance, pre-impregnated wipe.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

8. CONFORMITY AND APPROVALS

Compliance with standards of installation and manufacturing.
 See e.catalogue.