

## Presence detectors - talis II PHB 360-20-1i

Item 18.06.0020.1



### PRODUCT DESCRIPTION

In some cases, a presence detector installed at greater height just does the job better. Grässlin has these cases covered with its talis II PHB 360-20-1i. The device surveys a diameter of 20 metres from a height of up to 12 metres – it feels right at home in large halls, high-bay warehouses and the like. Its passive infrared sensor switches the connected electric consumer automatically depending on the ambient brightness and only when it detects that people are present. In this case, a remote control is more than a quality-of-life improvement – it's absolutely necessary to allow for adjustments. This presence detector offers a high energy efficiency through regular light balancing and offline function when there is sufficient daylight.

### APPLICATIONS

- ▶ Atriums
- ▶ Entrance Areas
- ▶ Garage
- ▶ Indoor/Outdoor Lighting
- ▶ Light Control
- ▶ Outdoor Applications
- ▶ Parking Lots
- ▶ Sport Halls
- ▶ Warehouse

### TECHNICAL DATA

#### General

Model Number	18.06.0020.1
Description	talis II PHB 360-20-1i
EAN Code	4010940046019
Scope of application	Inside/Outside

#### Control Specifications

Light level	approx. 10 Lux - infinite Lux; Lux Memory
-------------	---

#### Mechanical Specifications

Mounting Options	False Ceiling ; Ceiling; Surface Mounting (with accessories only); Ceiling (with accessories only)
------------------	--

#### Dimensions

Product Height (mm)	105
Product Width (mm)	105
Product Depth (mm)	66.5

#### Material Specifications

Color	White (similar to RAL 9016)
Product Weight (kg)	0.18

#### Communication Method

IR interface	Remote operation
--------------	------------------

#### Electrical Specifications

Supply Voltage	AC 230 V $\pm$ 10% 50-60 Hz
Load incandescent bulb	max. 2200 W

Load halogen lamp	max. 2200 W (AC); max. 1000 W (LV) conventional
Load compact fluorescent lamp	max. 140 µF (non-compensated)
Load LED lamp	max. 600 W
Load energy-saving bulbs	max. 600 W (incl. CFL and PL lamp)
Power consumption (Standby)	<1 VA
Parallel switching	Max. 10 sensors

#### Display and Format

Angle of detection	360°
Range walking towards	Ø 10 m
Range walking across	Ø 20 m
Installation height	12 m
Time setting (1CH)	approx. 30 sec. - 30 min.

#### Operating Specifications

Operating mode	Impulse function; Test Mode; Learning Function
----------------	--

#### Environmental Specifications



Temperature (operation)	-20°C..45°C
-------------------------	-------------

#### Standards and Certifications


Approval mark	CE
Protection class	II, According to Corresponding Mounting
Protection type	IP20, IP54 with Sealing
Standards and Guidelines	EN 55015; EN 60669-1; EN 61000-3-3; EN 61547; 2006/95/CE (LVD); EN 60660-2-1; 2004/108/CE (EMV); EN 61000-3-2

ANNEX

CIRCUIT DIAGRAMS

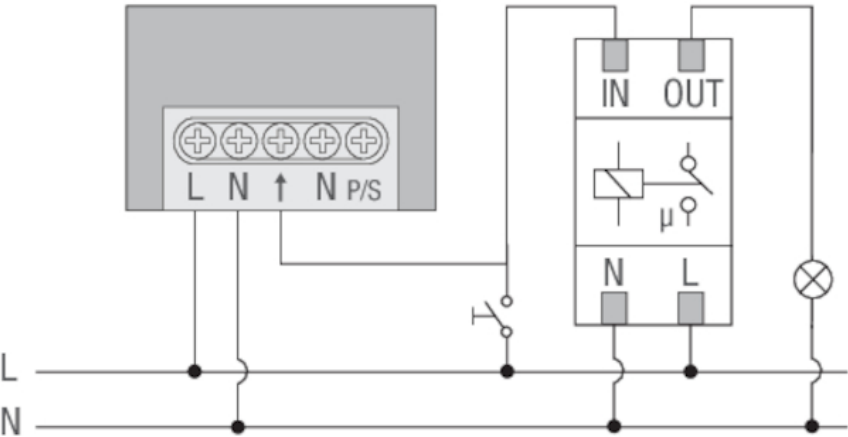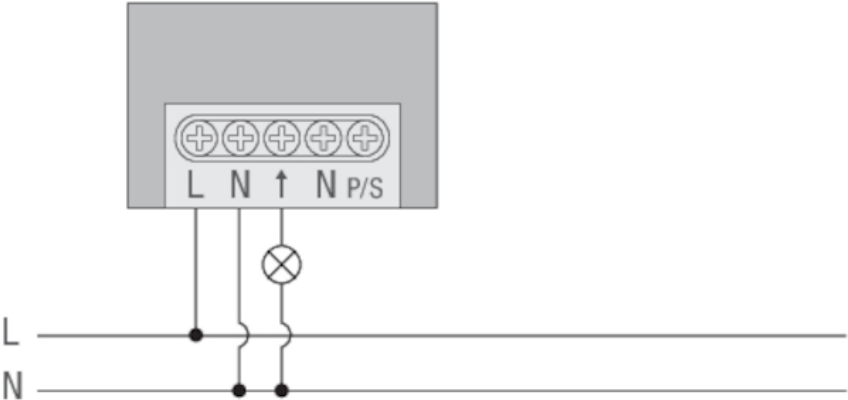


RANGE DIAGRAMS

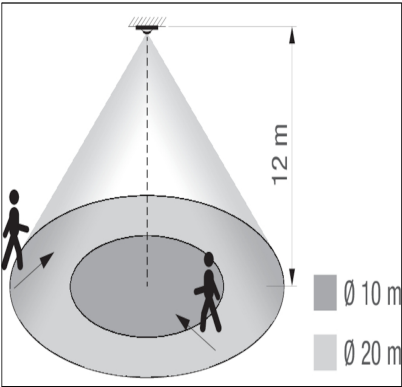

Installation height	Detection range (tangential movement)
3 m	Ø 10 m
6 m	Ø 12 m
9 m	Ø 14 m
12 m	Ø 20 m

DIMENSIONAL DRAWINGS

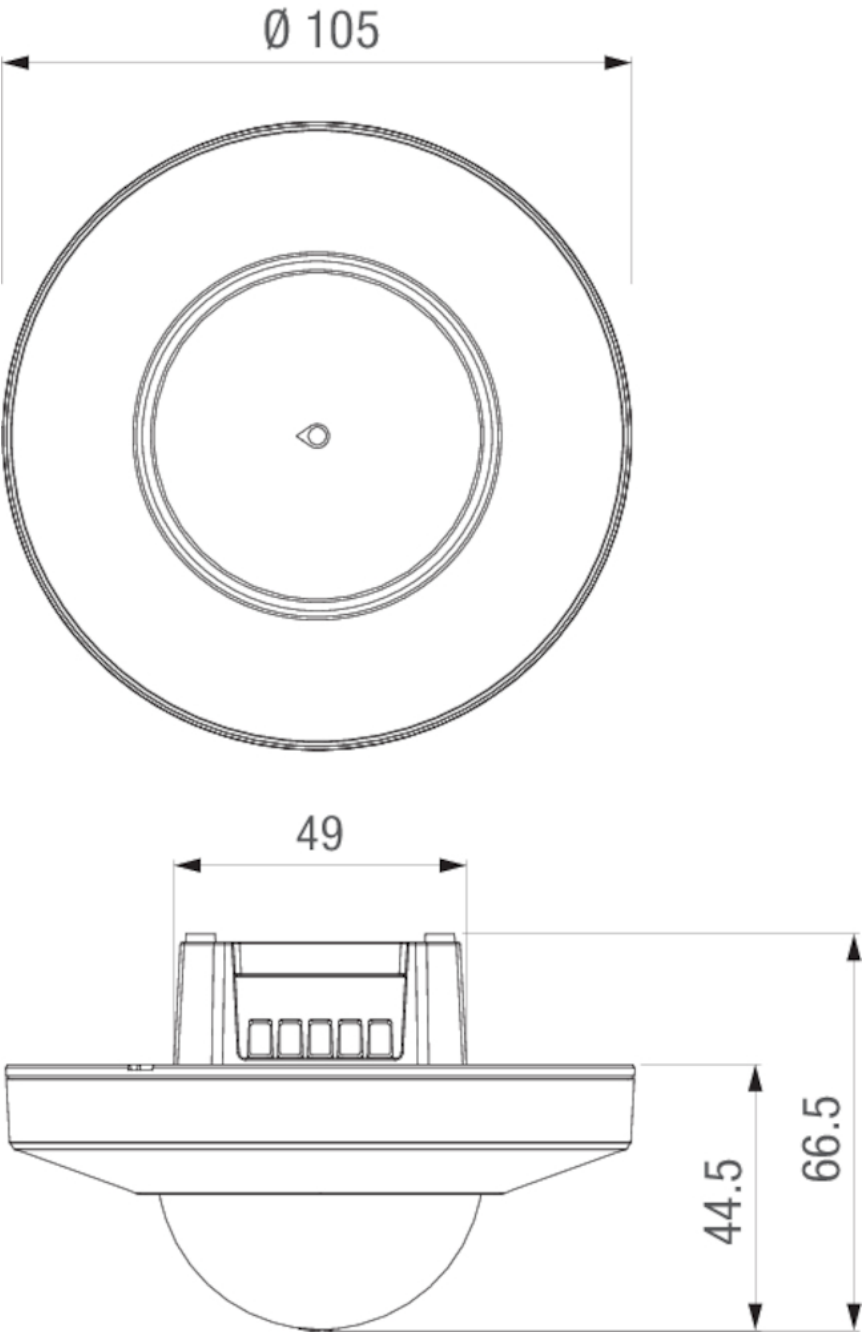

**ACCESSORIES**



07.10.0004.1  
talys II SM BOX 20



07.10.0006.1  
talys II RC IR10



07.10.0005.1  
talys II FC BOX 20