

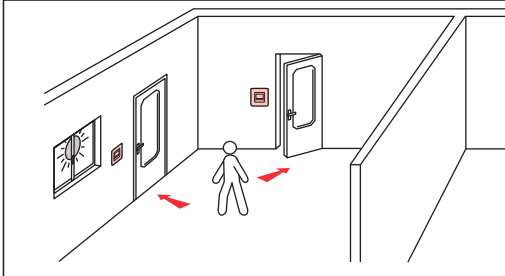





	100 - 240V~
	50 / 60 Hz
	2x 2.5mm ²
	-5°C/+45°C
	PIR
	day/dusk/night
	30S/90S/180S
	48m ²

230V~	400W	1.7A	200VA	200VA	200VA	200VA	100VA	100VA	100VA	0.42A	100VA	0.42A
110V~	200W		100VA	100VA	100VA	100VA	100VA	50VA	50VA	50VA	0.42A	0.42A


Name of light source:

1. Incandescent lamp
2. Electronic step-down converter for extra low-voltage incandescent lamps (e. g. halogen)
3. Iron core transformer for extra low-voltage incandescent lamps (e. g. halogen)
4. Fluorescent Lamp
5. Self-ballasted fluorescent compact lamp (CFL)
6. Selfballast LED lamp
7. Inductive Ballast Fluorescent Lamp with Compensator

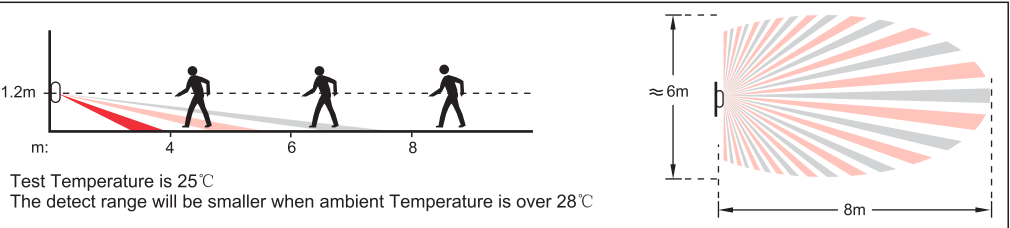

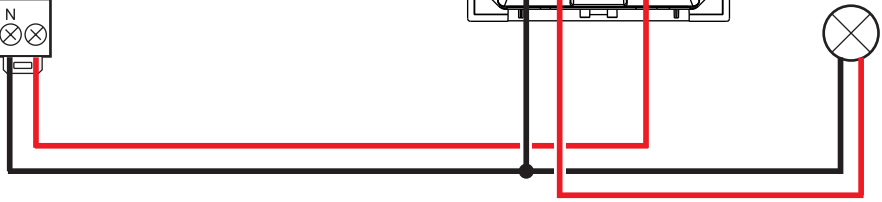

i www.legrandoc.com



day: 20~500lux
 dusk: 3 ~20lux
 night: <3lux

180S
 90S
 30S

