

Audio/video node

F441

Description

The audio/video node is a mixer device enabling distribution of up to 4 sound sources or 2-wire audio/video risers.

The 4 outputs will all have the same signal coming from the input selected among the 4 available.

The device must not be configured.

WARNING : Connections using both screw clamps and patch cords at the same time are NOT possible.

Technical data

Power supply from SCS BUS: 18 - 27 Vdc

Absorption from BUS: 20 mA

Dissipated power: 0.5 W


Operating temperature: 5 – 40 °C

Number of inputs available: 4

Number of outputs available: 4

Dimensional data

6 DIN modules

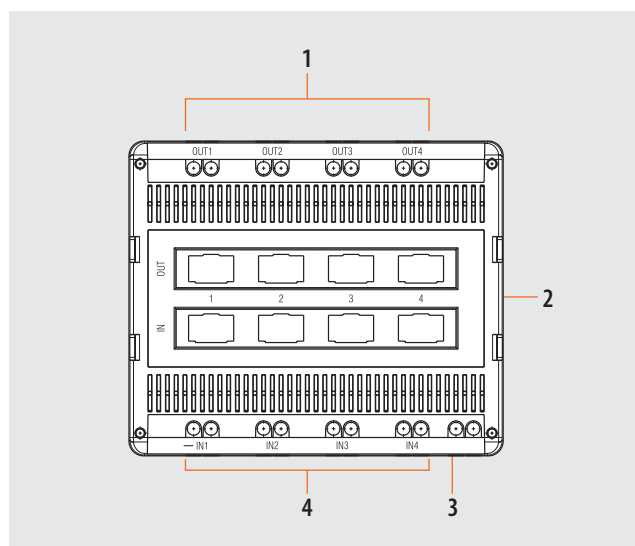

Legend

- 1 - Output clamps (OUT1 - OUT2 - OUT3 - OUT4) for the connection of 2-wire video risers or amplifiers
- 2 - Sockets for patch cord connection
- 3 - Clamps for the connection of the SCS BUS
- 4 - Input clamps (IN1 - IN2 - IN3 - IN4) for the connection of sound sources or entrance panels / cameras