

MINISFERA additional pushbutton panel

342704

Description

Additional 2 WIRE pushbutton module to be used together with audio modules 342702 and 342708.

Preset for 10 calls, it must be fitted with surround plate (332721) and keys (332712, 332713, 332714, 332715), according to personal installation requirements.

It may be installed side by side with, or above/below, the speaker module.

Maximum 6 expansion modules may be connected to a speaker module, 342702, or 342708.

It is supplied with multicable for the connection of the speaker module to other key expansion modules.

The device must be configured based on the type of keys used, as for audio modules 342702 and 342708.



Related items

- 342702 (MINISFERA audio speaker module)
- 342708 (MINISFERA video speaker module)
- 332710 (flush mounted box)
- 332711 (surface-mounted box)
- 332712 (narrow key 1 module with name label)
- 332713 (wide key 2 modules with name label)
- 332714 (2 modules nameplate with label)
- 332715 (1 module false key - grey)
- 332721 (aluminium surround plate)

Technical data

- Power supply from SCS BUS: 18 - 27 Vdc
- Max. operating absorption: 30 mA
- Operating temperature: (-25) - (+70)°C

Dimensional data

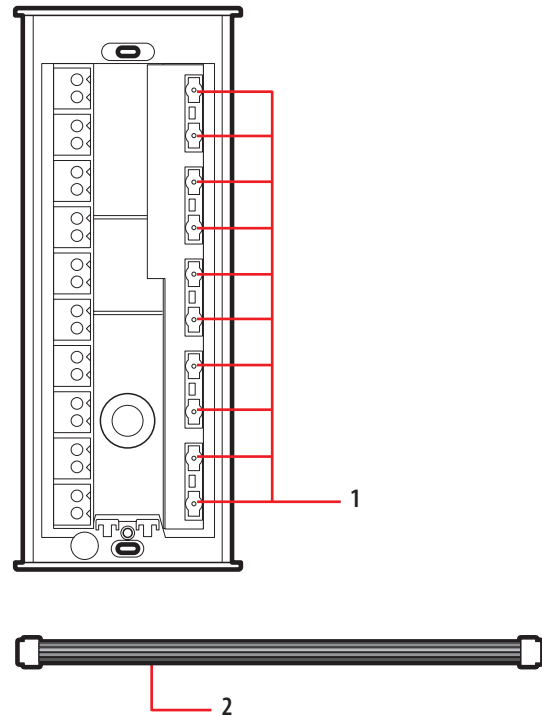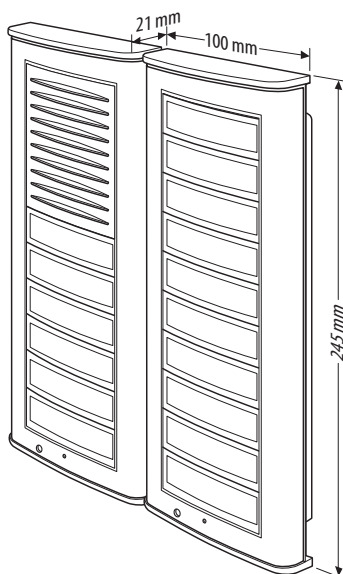


Legend

- 1 - Call keys
- 2 - Multicable supplied

Wiring diagram

To connect the speaker module (audio or video) to the 10 key module, the cable supplied must be used. The same cable must be used to connect other key modules to each other.

Connect the cable to OUT of the speaker module and to IN of the first key module. Connect the 2nd cable to OUT to the first key module and to IN of the second key module, and so on.

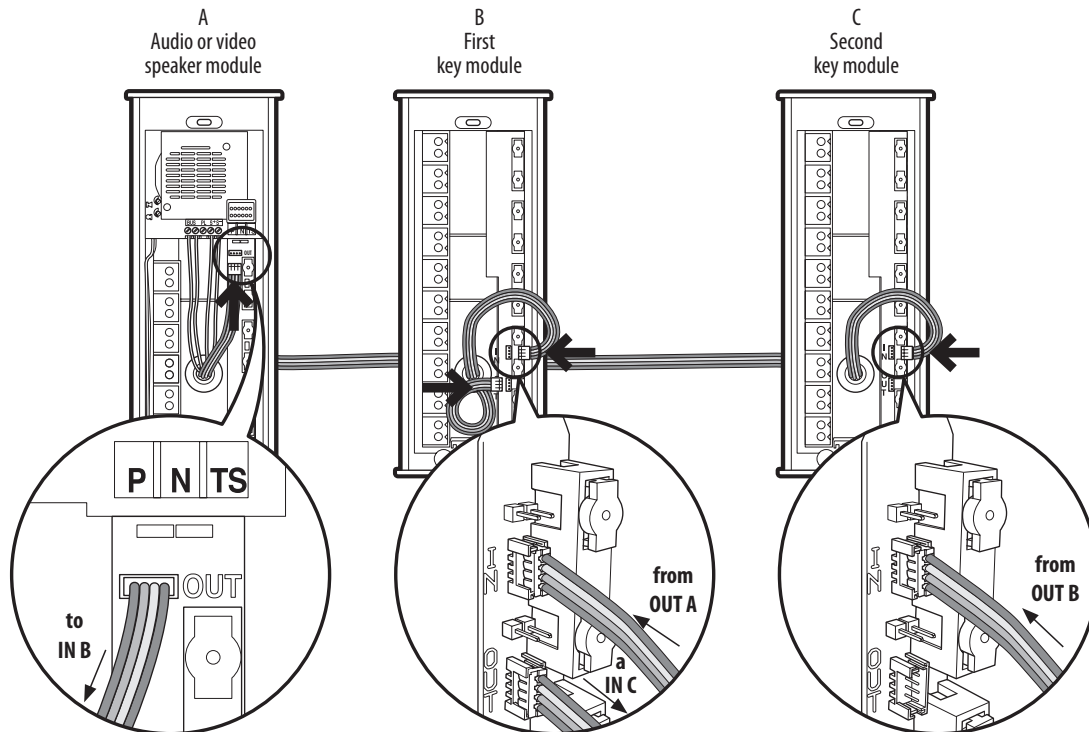

Example - Connection of two expansion modules 342704 and one MINISFERA audio or video speaker module.

Installation

