


ELX EL LED CPS SM

Item number EN10077067
GTIN 4015120077067

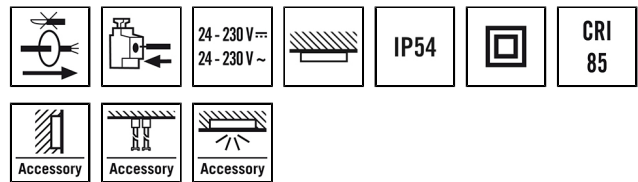

Product description

- Escape route light for connecting to central, uninterrupted power supply/power supply systems
- Self control of the light with coloured status indicator
- Plug-in terminal with through-wiring function
- Optimised for wall mounting. Other mounting options with a wide range of accessories (not included)
- UV-stabilised polycarbonate housing

Technical data

GENERAL

| | |
|---------------------|----------------|
| Device category | Safety light |
| Remote controllable | – |
| Conformity | CE, RoHS, WEEE |
| Warranty | 5 years |

ATTACHMENT

| | |
|--------------------------------|--|
| Installation type | Surface mounting |
| Installation position | Ceiling / wall |
| Installation dimension | Installation length: 430 mm x Installation width: 155 mm x Installation depth: 66 mm |
| Type of connection | Push terminal |
| Connectable wire cross section | 1,50 - 2,50 mm ² |

HOUSING

| | |
|---------------------------------|---|
| Dimensions | Length 388 mm x Width 148 mm x Height/Depth 46 mm |
| Weight | 739 g |
| Material | UV-stabilised polycarbonate |
| Protection type | IP54 |
| Permissible ambient temperature | 5 °C...+35 °C |
| Relative humidity | 5 - 95 %, non-condensing |
| Colour | white, similar to RAL 9016 |

ELECTRICAL VERSION

| | |
|------------------|-----------------|
| Protection class | II |
| Nominal voltage | 24 - 230 V |
| In-rush current | 16,6 A / 233 μs |
| Leakage current | 0,009 mA |

LIGHT

| | |
|---------------------------|----------|
| Light emission | direct |
| Beam angle | 112 ° |
| Rated output | 3 W |
| Luminous Flux (light) | 200 lm |
| Luminous efficacy | 66 lm/W |
| Colour temperature | 4000 K |
| Colour rendering index Ra | > 80 |
| Colour tolerance | SDCM < 3 |
| Color Quality Scale | 83 |
| Energy efficiency class | A++ to A |

EMERGENCY LIGHTING

| | |
|--------------------------|--------------------------|
| Power supply system | Central (common battery) |
| Battery status indicator | by LED |
| Automatic testing | – |

DATA SHEET


ELX EL LED CPS SM

Item number **GTIN**
EN10077067 4015120077067

Accessories

| Product designation | Item number | GTIN |
|-------------------------------|-------------|---------------|
| ELX BATTERY NiCd 1800mAh | EN10077418 | 4015120077418 |
| SLX/ELX WALL BRACKET 110 | EN10077289 | 4015120077289 |
| SLX/ELX MOUNTING FRAME 430 FM | EN10077234 | 4015120077234 |
| SLX/ELX BASKET GUARD WALL | EN10077265 | 4015120077265 |
| SLX/ELX TUBE PENDULUM SET | EN10078316 | 4015120078316 |
| SLX/ELX PENDULUM SET | EN10077258 | 4015120077258 |
| ESY-Pen | EP10425356 | 4015120425356 |

Scale drawing



Light distribution

