

# AVR8

LED | E27 | MT



AVR8.114LA

AVR8 is a modern, clear lined, durable and energy-efficient luminaire for outdoor lighting. Wall-mounted luminaire fit excellent for lighting entrances of multi-store buildings and areas nearby of industrial premises.





AVR8.114L




AVR8.114LAL

### Structure

- › Diffuser polycarbonat
- › Body casted aluminium
- › LED-model:  
The power can be selected by changing the connection at the installation site  
Connected load: 9W/13W/18W  
Luminaire luminous flux (4K):  
790 lm/1080 lm/1450 lm  
Preset: 9W/790 lm  
3000 K and 4000 K, Ra>80, power factor 0,92  
Ambient temperature - 40 °C - + 25 °C  
LED-module lifespan 100 000 h (L70B50),  
T<sub>a</sub>=25 °C

### Mounting

- › To the surface
- › Snap-in terminal block 3x2,5 mm<sup>2</sup> with through wiring
- › To the pole with AVL81 and AVL822 bracket
- › To the outer corner with AVL820 bracket

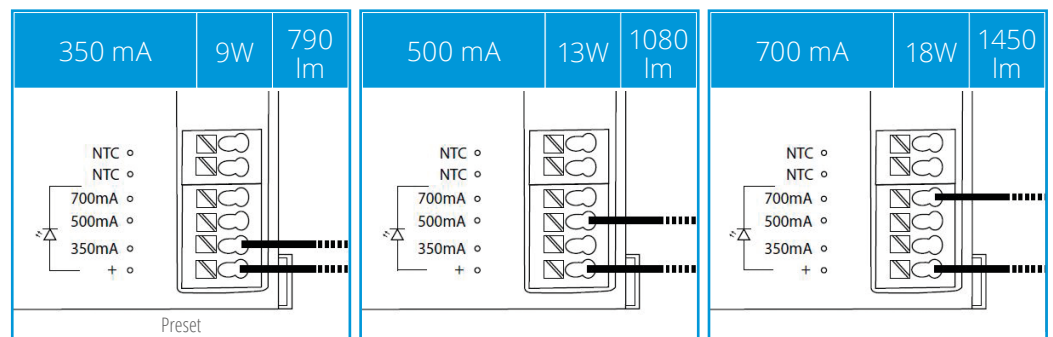

Ability to change luminous flux and power in the same luminaire.

E number	Type	Product name	Base	Kg	Luminous flux	Additional information
<b>AVR8 LED</b>						
45 170 07	AVR8.114L	AVR8 IP44 LED 9W/840 PCO WH	LED	2,4	790 lm/1080 lm/1450 lm	white
45 170 08	AVR8.114LA	AVR8 IP44 LED 9W/840 PCO BG	LED	2,4	790 lm/1080 lm/1450 lm	blackgrey (RAL7021)
45 170 10	AVR8.114LAL	AVR8 IP44 LED 9W/840 PCO AL	LED	2,4	790 lm/1080 lm/1450 lm	aluminium
45 170 32	AVR8.114L/3K	AVR8 IP44 LED 9W/830 PCO WH	LED	2,4	770 lm/1050 lm/1410 lm	white
45 170 34	AVR8.114LA/3K	AVR8 IP44 LED 9W/830 PCO BG	LED	2,4	770 lm/1050 lm/1410 lm	blackgrey (RAL7021)
45 170 35	AVR8.114LAL/3K	AVR8 IP44 LED 9W/830 PCO AL	LED	2,4	770 lm/1050 lm/1410 lm	aluminium
<b>AVR8 luminaire with E27 base</b>						
45 170 01	AVR8	AVR8 IP44 TC-TSE/E27 PCO WH	E27	2,0		white
45 170 02	AVR8.A	AVR8 IP44 TC-TSE/E27 PCO BG	E27	2,0		blackgrey (RAL7021)
45 170 04	AVR8.AL	AVR8 IP44 TC-TSE/E27 PCO AL	E27	2,0		aluminium
<b>AVR8 luminaire G12 metal halide</b>						
45 170 13	AVR8.035E	AVR8 IP44 MT 35W/G12 PCO WH	G12	2,2		white
45 170 14	AVR8.035EA	AVR8 IP44 MT 35W/G12 PCO BG	G12	2,2		blackgrey (RAL7021)
45 170 16	AVR8.035EAL	AVR8 IP44 MT 35W/G12 PCO AL	G12	2,2		aluminium
<b>AVR8 accessories and spare parts</b>						
45 170 17	AVL8	Number sign for AVR8 luminaire		0,2		white
45 170 31	AVL8.A	Number sign for AVR8 luminaire, graphite		0,2		graphite
45 170 38	AVL8.AL	Number sign for AVR8, aluminium		0,2		aluminium
45 170 40	AVL820	Corner bracket AVR8, white		1,4		white
45 170 26	AVL820.A	Corner bracket AVR8, graphite		1,4		graphite
45 170 28	AVL821.A	Pole bracket AVR8, graphite		1,4		graphite
45 170 29	AVL822.A	Pole bracket 2xAVR8, graphite		2,9		graphite
45 170 19	AVV8	Diffuser for AVR8 luminaire		0,2		white







AVL8




AVL820




AVL822

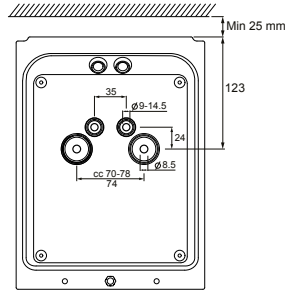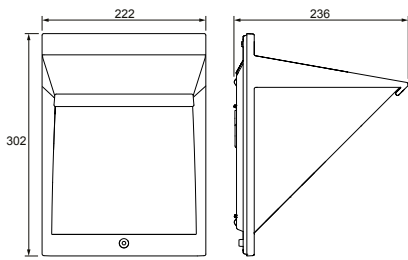


AVR8 luminaire

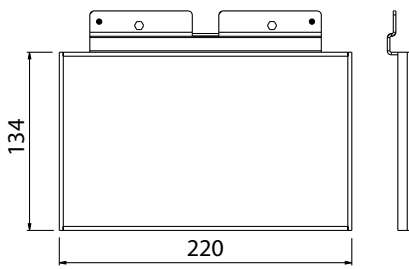


AVL8 number sign

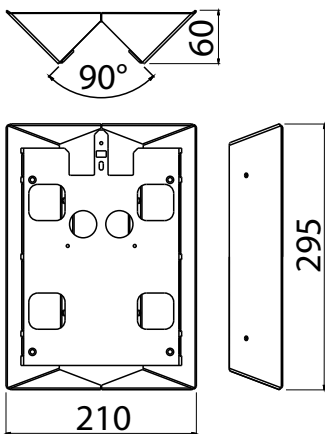

AVL820 corner bracket

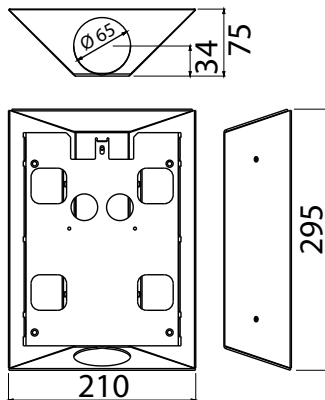

AVL821 pole bracket

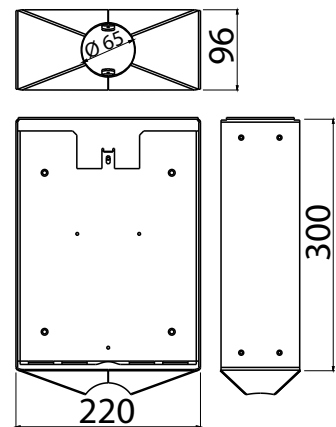

AVL822 pole bracket





When you are after a stylish and modern fixture, take a look at AVR8. Durable aluminium body complemented with energy efficient light is a beautiful option for facades around the town.

