



Valena™ Life
USB Type-A + USB Type-C charger
USB Type-C charger

Cat. No(s): 7 531 06/07 - 7 532 06/07
7 533 06/07



7 53X 06



7 53X 07

1. USE


For recharging portable devices such as phones, smartphones, tablets, MP3 or MP4 players, loudspeakers, watches, game consoles, powerbanks.

2. RANGE

USB chargers 5 V= / 3.0 A		Cat. No :
1 USB Type-A + 1 USB Type-C (1 output Type-A - 1 output Type-C)		7 53X 06
2 USB Type-C (2 output Type-C)		7 53X 07

White	Ivory	Aluminium
7 531 06	7 532 06	7 533 06
7 531 07	7 532 07	7 533 07

3. DIMENSIONS (mm)

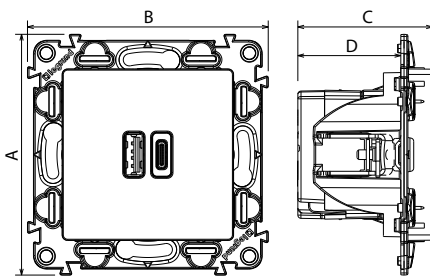

A	B	C	D
74.7	74.7	42	32

4. CONNECTION

Type of terminals: with screws
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 6 mm
 Screwdriver: flat 3.5 mm

5. TECHNICAL CHARACTERISTICS

■ **5.1 Mechanical characteristics**

Impact tests: IK 04
 Penetration by solid bodies/liquid: IP 40

■ **5.2 Material characteristics**

Base: PC
 Cover-plate: ABS
 Support: PC
 Self-extinguishing:
 + 850° C / 30 s for insulating parts holding live parts in place.
 + 650° C / 30 s for other parts made of insulating materials.

■ **5.3 Climatic characteristics**

Storage temperature: - 20° C to + 70° C
 Operating temperature: 0° C to + 45° C

■ **5.4 Electrical characteristics**

All values listed below are measured at an ambient temperature of + 25° and after 15 minutes of operation.

Nominal input voltage	100 - 240 V~
Nominal input frequency	50-60 Hz
Power consumption	15 W
Maximum input current	300 mA
Maximum power consumption in standby	0.075 W
Power average efficiency	80.3 %
Nominal output voltage	5 V=
Maximum output current Type-A + Type-C	3 A shared on A and C output
Maximum output current Type-C	3 A
Classe de consommation hors charge et niveau moyen d'efficacité : Niveau VI*	
Classe de protection	II - Basse tension

*Nota: European Regulation No. 278/2009 of 6 April 2009, Directive 2005/32/EC on eco-design requirements for AC/DC power supplies.

Note : To optimize the charging time of your device, ensure turn it off during the charging phase.

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichlorethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.

Refer to e-catalogue.